

## TRANSCRIPT

## FIELD NOTES

OF ~~THE SURVEY OF~~ THE

DEPENDENT RESURVEY

of a Portion

of the

Exteriors and Subdivisions

of

Township 37 South, Range 29 East,

Of the Tallahassee Meridian,

In the State of Florida.

## EXECUTED BY

Arthur W. Brown, U. S. Cadastral Engineer,

assisted by

Hal. D. Craig, Everett H. Kimmell and Keith K. Kimmell, U. S. Transitlemen.

In the capacity of U. S. Surveyors, under Special Instructions dated December 24, 1919,

A. D. Kidder, Associate Supervisor of Surveys  
issued by the United States Surveyor General to govern surveys included in Group

No. 3, which were approved by the Commissioner of the General Land


Office, January 5, 1920, and Assignment Instructions dated December 31, 1919.

Survey commenced February 19, 1920.

Survey completed March 3, 1920.

## INDEX DIAGRAM.

*Township* 37 South, *Range* 29 East

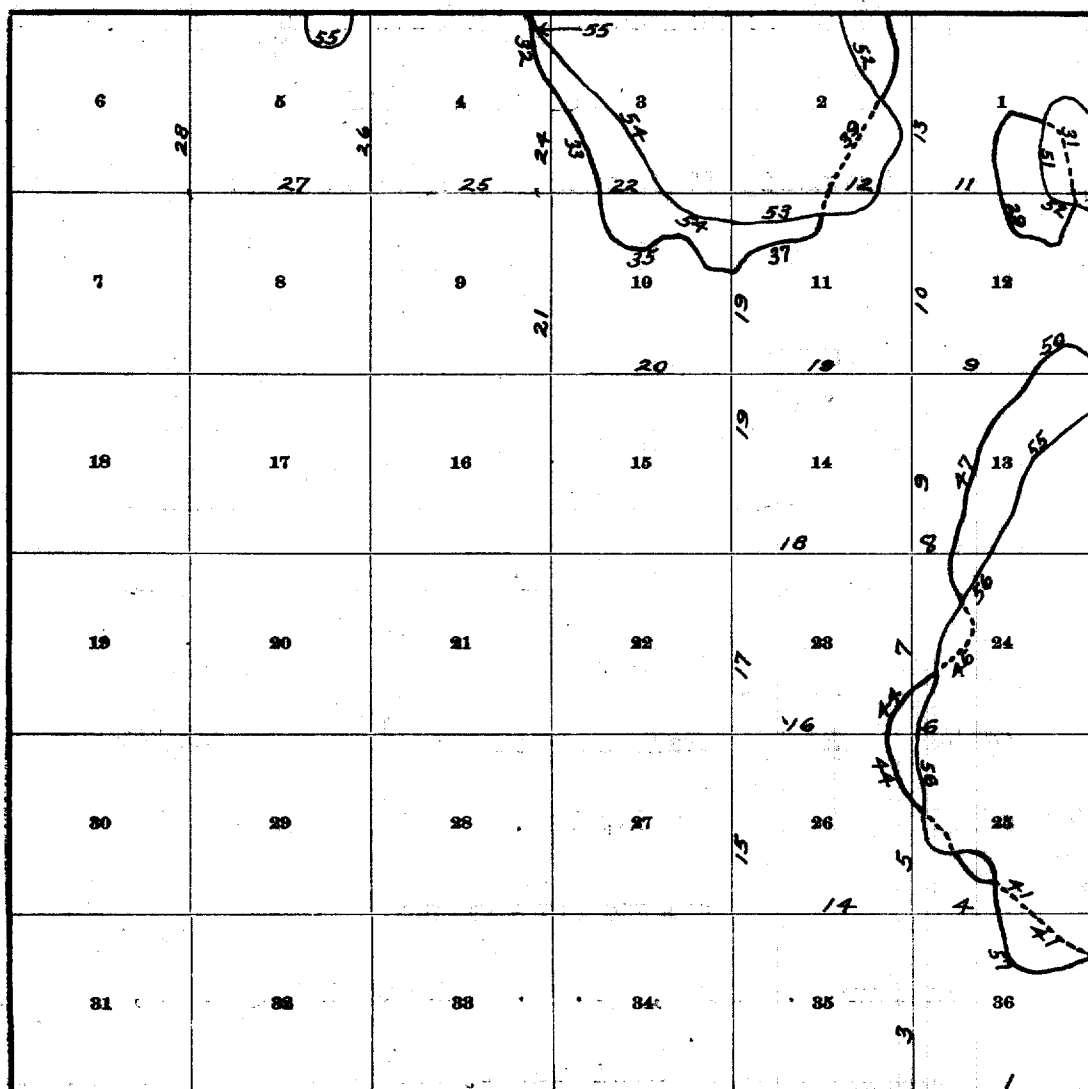

Dependent Resurvey of a Portion of the Extérieurs and  
Subdivisions of T. 37 S., R. 29 E.,  
Tallahassee Meridian, Florida.

Chains

Survey commenced Feb. 19, 1920, and executed with Young and Sons transit No. 8523, used by Hal D. Craig, U. S. Transitman; Buff and Buff transit No. 9304, used by Keith K. Kimmell, U. S. Transitman, and Buff and Buff transit No. 9796, used by Everett H. Kimmell, U. S. Transitman. For description and test of above instruments see Book "A" of this group.

Investigation disclosed the fact that to comply with the requirements of the Special Instructions and Public 71, 66th Congress, it would only be necessary to resurvey secs. 1 to 5 inc; 10 to 13 inc; 23 to 26 inc. and sec. 36.

The East boundary of the township was resurveyed by A. N. Kimmell and Wm. H. Richards, U. S. Surveyors, in 1917. The resurvey notes of the North boundary of the township will be found in Book "A" of this group. On the South boundary of the township I find the cor. of secs. 1, 2, 35 and 36 and the cor. of secs. 4, 5, 32 and 33, both corners are used as points of control in making the subdivisional resurvey. Within the township lost sec. cors. were re-established as follows: the cor. of secs. 4, 5, 8 and 9, and the cor. of secs. 11, 12, 13 and 14, by double proportionate measurement; the cor. of secs. 14, 15, 22 and 23, by single proportionate measurement bet. the cor. of secs. 10, 11, 14 and 15, and the  $\frac{1}{2}$  sec. cor. of secs. 22 and 23; the cors. of secs. 13, 14, 23 and 24, and the cor. of secs. 23, 24, 25 and 26, by single proportionate measurement in the N. and S. direction and record distance from the west; the cor. of secs. 1, 2, 11 and 12, by single proportionate measurement in a N. and S. direction and record distance from the east. Lines terminating on the shores of Lakes Childs or Stearns are run record courses from nearest sec. cors. and meander cors. for fictitious meander lines established at record distances.

---

Notes of a Portion of the South Boundary of T. 37 S.,  
R. 29 E.

I commence at the cor. of townships 37 and 38 South, Ranges 29 and 30 East, which is an iron post, 3 ins. diam., set flush with roadway surface in which it sets, marked and witnessed as described in the field notes of the resurvey of T. 37 S., R. 30 E., executed by A. N. Kimmell and Wm. H. Richards, in 1917.

Thence

N. 89° 50' W., on true line, bet. secs. 1 and 36, on the south boundary of the township.

Along center of Dixie Highway, over flat woods country.

40.48

The proportionate point for the  $\frac{1}{2}$  sec. cor.

Set an iron post, 3 ft. long, 1 in. diam., 36 ins. in the ground, with brass cap mkd.

Dependent Resurvey of a Portion of the Extentors and  
Subdivisions of T. 37 S., R. 29 E.

Chains

S 36

S 1

1920

From which

A pine, 20 ins. diam., bears N.  $73\frac{1}{2}^{\circ}$  W., 84 lks.  
dist., mkd.  $\frac{1}{2}$  S 36 B T.

A pine, 10 ins. diam., bears S.  $5^{\circ}$  W., 167 lks.  
dist., mkd.  $\frac{1}{2}$  S 1 B T.

69.45 Creek, 10 lks. wide, 6 ins. deep, course N.

80.95 The point for the original cor. of secs. 1, 2, 35 and  
36, determined from the original bearing trees  
and remains of rotted post.

Set an iron post, 3 ft. long, 2 ins. diam., 36 ins.  
in the ground, with brass cap mkd.

T 37 S

R 29 E

S 35 | S 36

S 2 | S 1

T 38 S

1920

From which

(The following are old bearing trees, marked in the  
back only.

A pine, 10 ins. diam., bears N.  $33\frac{1}{2}^{\circ}$  E., 51 lks.  
dist., dimly mkd., I remark it T 37 S R 29 E S 36 B T.

A pine, 16 ins. diam., bears S.  $66^{\circ}$  E., 256 lks.  
dist., dimly mkd., I remark it T 38 S R 29 E S 1 B T.

A pine, 16 ins. diam., bears S.  $18\frac{1}{2}^{\circ}$  W., 163 lks.  
dist., dimly mkd., I remark it T 38 S R 29 E S 2 B T.

A pine, 18 ins. diam., bears N.  $46^{\circ}$  W., 227 lks.  
dist., dimly mkd., I remark it T 37 S R 29 E S 35 B T.

Cor. falls in center of Dixie Highway, bears E. and W.

Land, level.

Soil, sandy; 3rd rate.

Timber, pine.

The original cor. of secs. 4, 5, 32 and 33, on the S.  
bdy. of the township is a pine post, 4 ins. square,  
18 ins. long, dimly mkd. This post we find buried  
8 ins. below the surface of the Dixie Highway, but  
in an upright position, the post is of great age  
and is undoubtedly the original cor.

Alongside the old post, I

Dependent Resurvey of a Portion of the Exterior and  
Subdivisions of T. 37 S., R. 29 E.

Chains

Set an iron post, 3 ft. long, 2 ins. diam., 36 ins.  
in the ground, with brass cap mkd.

T 37 S		
R 29 E		
S 32		S 33
S 5		S 4
T 38 S		
1920		

From which

(The following are new bearing trees).

A pine, 20 ins. diam., bears N.  $20\frac{1}{2}^{\circ}$  E., 6.93 chs.  
dist., mkd. T 37 S R 29 E S 33 B T.

A pine, 20 ins. diam., bears S.  $87\frac{1}{2}^{\circ}$  E., 9.62 chs.  
dist., mkd. T 38 S R 29 E S 4 B T.

A pine, 24 ins. diam., bears S.  $11^{\circ}$  W., 6.45 chs.  
dist., mkd. T 38 S R 29 E S 5 B T.

No other bearing trees available.

Cor. set flush with surface of road in Dixie Highway,  
which bears E. and W.

From the cor. of sees. 1, 2, 35 and 36, on the S. bdy.  
of the township.

Thence

N.  $0^{\circ} 19'$  E., on true line, bet. sees. 35 and 36.

Over flat woods area.

17.45 Creek, 4 lks. wide, 6 ins. deep, course NE.

40.28 The proportionate point for the  $\frac{1}{2}$  sec. cor.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins.  
in the ground, with brass cap mkd.

S 35		S 36
1920		

From which

A pine, 20 ins. diam., bears S.  $30^{\circ}$  W., 120 lks.  
dist., mkd.  $\frac{1}{2}$  S 35 B T.

A pine, 18 ins. diam., bears S.  $60^{\circ}$  E., 106 lks.  
dist., mkd.  $\frac{1}{2}$  S 36 B T.

64.55 Creek, 3 lks. wide, 6 ins. deep, course N.  $15^{\circ}$  E.

80.55 The original cor. of sees. 25, 26, 35 and 36, is a  
post, 3 ins. square, 12 ins. above ground, dimly  
mkd.

Alongside the original cor. post, I

Dependent Resurvey of a Portion of the Exteriors and  
Subdivisions of T. 37 S., R. 29 E.

## Chains

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins.  
in the ground, with brass cap mkd.

T 37 S   R 29 E  
S 26   S 25  
-----  
S 35   S 36  
1920

From which

(The following are original bearing trees).

A pine, 18 ins. diam., bears N.  $45^{\circ}$  E., 259 lks.  
dist., unmarked. I mark it T 37 S R 29 E S 25 B T.

A pine, 14 ins. diam., bears S.  $12\frac{1}{2}^{\circ}$  E., 37 lks.  
dist., unmarked. I mark it T 37 S R 29 E S 36 B T.

A pine, 16 ins. diam., bears S.  $11\frac{3}{4}^{\circ}$  W., 47 lks.  
dist., unmarked. I mark it T 37 S R 29 E S 35 B T.

A pine, 20 ins. diam., bears N.  $53\frac{1}{2}^{\circ}$  W., 131 lks.  
dist., unmarked. I mark it T 37 S R 29 E S 26 B T.

Land, level.

Soil, sandy; 3rd rate.

Timber, pine.

Undergrowth, oak and palmetto.

Thence

East, on true line, bet. sees. 25 and 36.

Over flat woods area.

6.40 Leave flat woods; enter bay gall, bears N. and S.

7.30 Creek, 10 lks. wide, 8 ins. deep, course NE.

7.70 Leave bay gall; enter flat woods, bears N. and S.

40.00 The record distance for the  $\frac{1}{4}$  sec. cor.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in  
the ground, with brass cap mkd.

S 25  
S  $\frac{1}{4}$  —————  
S 36  
1920

From which

A pine, 16 ins. diam., bears N.  $46\frac{1}{2}^{\circ}$  E., 95 lks.  
dist., mkd.  $\frac{1}{4}$  S 25 B T.


A pine, 12 ins. diam., bears S.  $37^{\circ}$  W., 56 lks.  
dist., mkd.  $\frac{1}{4}$  S 36 B T.

43.46 Intersect the true meander line of Lake Childs, on the  
W. side of the lake.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in  
the ground, for the meander cor. of sees. 25 and 36,  
with brass cap mkd.

Dependent Resurvey of a Portion of the Exteriors and  
Subdivisions of T. 37 S., R. 29 E.

Chains



From which

A pine, 16 ins. diam., bears N. 60° W., 36 lks. dist., mkd. T 37 S R 29 E S 25 M C B T.

A pine, 10 ins. diam., bears S. 54½° W., 26 lks. dist., mkd. T 37 S R 29 E S 36 M C B T.

Thence across the waters of Lake Childs.

- 51.85 The record distance for the meander cor. of sees. 25 and 36, on the fictitious meander line of Lake Childs. This point falls in lake.

Land, level.

Soil, sandy; 3rd rate.

Timber, pine.

Undergrowth, oak, palmetto and bay.

From the cor. of sees. 25, 26, 35 and 36.

Thence


N. 1° 09' W., on true line, bet. sees. 25 and 26.

Over flat woods area.

- 12.50 Road, bears NR. and SW.

- 40.18 The proportionate point for the ¼ see. cor.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, with brass cap mkd.




From which

A pine, 12 ins. diam., bears N. 52° E., 153 lks. dist., mkd. ¼ S 25 B T.

A pine, 6 ins. diam., bears N. 81° W., 198 lks. dist., mkd. ¼ S 26 B T.

- 62.38 The proportionate point for the meander cor. of sees. 25 and 26, on the fictitious meander line of Lake Childs.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, with brass cap mkd.



Dependent Resurvey of a Portion of the Exteriors and  
Subdivisions of T. 37 S., R. 29 E.

## Chains

## From which

A pine, 10 ins. diam., bears N. 3° E., 3.56 chs.  
dist., mkd. T 37 S R 29 E S 25 M C B T.

A pine, 10 ins. diam., bears N. 77½° W., 200 lks.  
dist., mkd. T 37 S R 29 E S 25 M C B T.

80.36 The proportionate point for the cor. of sees. 23, 24,  
25 and 26.

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins.  
in the ground, with brass cap mkd.

T 37 S	R 29 E
S 23	S 24
<hr/>	
S 26	S 25
1920	

## From which

A pine, 12 ins. diam., bears N. 30½° W., 355 lks.  
dist., mkd. T 37 S R 29 E S 23 B T.

A live oak, 8 ins. diam., bears S. 67½° E., 8 lks.  
dist., mkd. T 37 S R 29 E S 25 B T.

No other bearing trees available.

Land, level.

Soil, sandy; 3rd rate.

Timber, pine.

Undergrowth, oak and palmetto.

## Thence

East, on a true line, bet. sees. 24 and 25.

0.68 Intersect the true meander line of Lake Childs, on  
the West side of the lake.

Set an iron post, 3ft. long, 1 in. diam., 28 ins. in  
the ground, for the meander cor. of sees. 24 and  
25, with brass cap mkd.

T 37 S	
S 24	
<hr/>	
S 25	MO
R 29 E	
1920	

## From which

An oak, 8 ins. diam., bears S. 86° W., 61 lks.  
dist., mkd. T 37 S R 29 E S 25 M C B T.

No other bearing trees available.

Land, level.

Soil, sandy; 3rd rate.

Timber, pine.

Undergrowth, oak and palmetto.



Dependent Resurvey of a Portion of the Exterior and  
Subdivisions of T. 37 S., R. 29 E.

## Chains

From the cor. of secs. 23, 24, 25 and 26.

Thence

N. 0° 29' W., on true line, bet. secs. 23 and 24.

Over sandy flat woods land, through undergrowth and  
scattering timber.

20.59 The proportionate point for the meander cor. of secs.  
23 and 24, on the fictitious meander line of Lake  
Childs.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins.  
in the ground, with brass cap mkd.

T 37 S	R 29 E
S 23	S 24
M C	
1920	

From which

A pine, 22 ins. diam., bears N. 30° W., 186 lks.  
dist., mkd. T 37 S R 29 E S 23 M C B T.

A pine, 30 ins. diam., bears S. 42° E., 10 lks.  
dist., mkd. T 37 S R 29 E S 24 M C B T.

40.17 The proportionate point for the  $\frac{1}{4}$  sec. cor.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins.  
in the ground, with brass cap mkd.

	$\frac{1}{4}$	
S 23		S 24
1920		

From which

A pine, 8 ins. diam., bears N. 74 $\frac{3}{4}$ ° E., 49 lks.  
dist., mkd.  $\frac{1}{4}$  S 24 B T.

A pine, 6 ins. diam., bears S. 35 $\frac{1}{2}$ ° W., 148 lks.  
dist., mkd.  $\frac{1}{4}$  S 23 B T.

80.34 The proportionate point for the cor. of secs. 13, 14,  
23 and 24.

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in  
the ground, with brass cap mkd.

T 37 S	R 29 E
S 14	S 13
<hr/>	
S 23	S 24
1920	

From which

A pine, 14 ins. diam., bears N. 70° E., 259 lks.  
dist., mkd. T 37 S R 29 E S 13 B T.

A pine, 12 ins. diam., bears S. 41° E., 168 lks.  
dist., mkd. T 37 S R 29 E S 24 B T.

Dependent Resurvey of a Portion of the Exterior and  
Subdivisions of T. 37 S., R. 29 E.

## Chains

A pine, 14 ins. diam., bears S.  $21\frac{1}{2}^{\circ}$  W., 135 lks.  
dist., mkd. T 37 S R 29 E S 23 B T.

A pine, 18 ins. diam., bears N.  $32\frac{1}{2}^{\circ}$  W., 147 lks.  
dist., mkd. T 37 S R 29 E S 14 B T.

Land, level.

Soil, sandy; 3rd rate.

Timber, pine.

Undergrowth, oak and palmetto.

## Thence

East, on a true line, bet. sees. 13 and 24.

Over rolling land, through dense undergrowth and  
scattering timber.

12.90 The record distance for the meander cor. of sees. 13  
and 24, on the fictitious meander line of Lake  
Childs.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins.  
in the ground, with brass cap mkd.

T 37 S  
S 13  
----- M C  
S 24  
R 29 E  
1920

## From which

A pine, 10 ins. diam., bears N.  $7\frac{1}{2}^{\circ}$  W., 93 lks.  
dist., mkd. T 37 S R 29 E S 13 M C B T.

A pine, 16 ins. diam., bears S.  $33\frac{1}{2}^{\circ}$  E., 103 lks.  
dist., mkd. T 37 S R 29 E S 24 M C B T.

20.70 Intersect the true meander line of Lake Childs on the  
west side of the lake.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins.  
in the ground, for meander cor. of sees. 13 and 24,  
with brass cap mkd.

T 37 S  
S 13  
----- M C  
S 24  
R 29 E  
1920

## From which

A pine, 6 ins. diam., bears N.  $27\frac{1}{2}^{\circ}$  W., 52 lks.  
dist., mkd. T 37 S R 29 E S 13 M C B T.

A pine, 8 ins. diam., bears S.  $51^{\circ}$  W., 309 lks.  
dist., mkd. T 37 S R 29 E S 24 M C B T.

Land, rolling.

Soil, sandy loam; 2nd rate.

Timber, pine.

Undergrowth, oak, hickory and palmetto.

Dependent Resurvey of a Portion of the Exteriors and  
Subdivisions of T. 37 S., R. 29 E.

## Chains

From the cers. of sees. 13, 14, 23 and 24.

Thence

N.  $0^{\circ} 42'$  W., on a true line, bet. sees. 13 and 14.

Over rolling land, through undergrowth and scattering timber.

40.18 The proportionate point for the  $\frac{1}{2}$  sec. cer.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, with brass cap mkd.

	+	
S 14		S 13
1920		

From which

A pine, 12 ins. diam., bears N.  $81\frac{1}{2}^{\circ}$  E., 89 lks. dist., mkd.  $\frac{1}{2}$  S 13 B T.

A pine, 10 ins. diam., bears S.  $45\frac{1}{2}^{\circ}$  W., 109 lks. dist., mkd.  $\frac{1}{2}$  S 14 B T.

80.35 The proportionate point for the cer. of sees. 11, 12, 13 and 14.

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, with brass cap mkd.

T 37 S		R 29 E
S 11		S 12
-----		
S 14		S 13
1920		

From which

A pine, 6 ins. diam., bears N.  $6\frac{1}{2}^{\circ}$  E., 370 lks. dist., mkd. T 37 S R 29 E S 12 B T.

A pine, 8 ins. diam., bears S.  $47\frac{1}{2}^{\circ}$  E., 308 lks. dist., mkd. T 37 S R 29 E S 13 B T.

A pine, 6 ins. diam., bears N.  $39^{\circ}$  W., 407 lks. dist., mkd. T 37 S R 29 E S 11 B T.

No other bearing trees available.

Land, rolling.

Soil, sandy clay loam; 2nd rate.

Timber, pine.

Undergrowth, oak, hickory and palmetto.

Thence

East, on true line, bet. sees. 12 and 13.

Over rolling land, through timber and dense undergrowth.

40.20 The proportionate point for the  $\frac{1}{2}$  sec. cer.

Dependent Resurvey of a Portion of the Extérieurs and  
Subdivisions of T. 37 S., R. 29 E.

## Chains

Set an iron post, 3 ft. long, 1 in. diam., 28 ins.  
in the ground, with brass cap mkd.

S 12

$\frac{1}{2}$  —————

S 13

1920

## From which

A spruce pine, 8 ins. diam., bears S.  $30\frac{1}{2}^{\circ}$  W.,  
457 lks. dist., mkd.  $\frac{1}{2}$  S 13 B T.

A hickory, 6 ins. diam., bears N.  $75\frac{1}{2}^{\circ}$  W., 224 lks.  
dist., mkd.  $\frac{1}{2}$  S 12 B T.

- 57.38 The proportionate point for the meander cor. of sees.  
12 and 13, on the fictitious meander line of Lake  
Childs.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in  
the ground, with brass cap mkd.

T 37 S

S 12

————— M C

S 13

R 29 E

1920

## From which

A spruce pine, 10 ins. diam., bears S.  $31\frac{1}{2}^{\circ}$  W.,  
134 lks. dist., mkd. T 37 S R 29 E S 13 M C B T.

- 80.39 Intersect the cor. of sees. 7, 12, 13 and 18, on the  
east bdy. of the township, which is an iron post,  
3 ins. diam., 8 ins. above ground, mkd. and  
witnessed as described in the field notes of the  
resurvey of T. 37 S., R 29 E., executed by A. N.  
Kimmell and Wm. H. Richards in 1917.

Land, rolling.

Soil, sandy clay loam; 2nd rate.

Timber, pine.

Undergrowth, oak, hickory and palmetto.

From the cor. of sees. 11, 12, 13 and 14.

Thence

N.  $0^{\circ} 57'$  W., on true line, bet. sees. 11 and 12.

Over rolling land, through dense undergrowth and  
scattering timber.

- 40.18 The proportionate point for the  $\frac{1}{2}$  sec. cor.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in  
the ground, with brass cap mkd.

$\frac{1}{2}$

S 11 | S 12

1920

Dependent Resurvey of a Portion of the Exteriors and  
Subdivisions of T. 37 S., R. 29 E.

Chains

From which

A pine, 8 ins. diam., bears N.  $73\frac{1}{2}^{\circ}$  E., 165 lks.  
dist., mkd.  $\frac{1}{4}$  S 12 B T.

A pine, 10 ins. diam., bears S.  $49\frac{1}{2}^{\circ}$  W., 160 lks.  
dist., mkd.  $\frac{1}{4}$  S 11 B T.

89.35 The proportionate point for the cor. of secs. 1, 2, 11  
and 12.

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins.  
in the ground, with brass cap mkd.

T 37 S	R 29 E
S 2	S 1
<hr/>	
S 11	S 12
1920	

From which

A pine, 16 ins. diam., bears N.  $53^{\circ}$  E., 4.38 chs.  
dist., mkd. T 37 S R 29 E S 1 B T.

A pine, 18 ins. diam., bears S.  $36\frac{1}{2}^{\circ}$  E., 1.14 chs.  
dist., mkd. T 37 S R 29 E S 12 B T.

A pine, 18 ins. diam., bears S.  $12^{\circ}$  W., 228 lks.  
dist., mkd. T 37 S R 29 E S 11 B T.

No other trees available.

Land, rolling.

Soil, sandy clay loam; 2nd rate.

Timber, oak, hickory and palmetto.

Thence

N.  $89^{\circ} 52'$  E., on a true line, bet. secs. 1 and 12.

Over rolling land, through undergrowth and timber.

38.10 The record distance for the meander cor. of secs. 1  
and 12, on the fictitious meander line of Lake  
Sirena.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins.  
in the ground, with brass cap mkd.

T 37 S	
S 1	
<hr/>	
S 12	M C
R 29 E	
1920	

From which

A pine, 14 ins. diam., bears N.  $34\frac{3}{4}^{\circ}$  E., 343 lks.  
dist., mkd. T 37 S R 29 E S 1 M C B T.

A pine, 18 ins. diam., bears S.  $42^{\circ}$  E., 427 lks.  
dist., mkd. T 37 S R 29 E S 12 M C B T.

40.30 The proportionate point for the  $\frac{1}{4}$  sec. cor.

Dependent Resurvey of a Portion of the Exteriors and  
Subdivisions of T. 37 S., R. 29 E.

## Chains

Set an iron post, 3 ft. long, 1 in. diam., 28 ins.  
in the ground, with brass cap mkd.

S 1  
—  
S 12  
1920

From which

A pine, 10 ins. diam., bears N.  $4\frac{1}{2}^{\circ}$  E., 315 lks.  
dist., mkd.  $\frac{1}{2}$  S 1 B T.

A pine, 12 ins. diam., bears S.  $20\frac{1}{2}^{\circ}$  E., 315 lks.  
dist., mkd.  $\frac{1}{2}$  S 12 B T.

57.30 Road, bears NW. and SE.

59.52 Intersect the true meander line of Lake Sirena, on  
the west side of the lake.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins.  
in the ground, for meander cor. of secs. 1 and 12,  
with brass cap mkd.

T 37 S  
S 1  
— M C  
S 12  
R 29 E  
1920

From which

A pine, 10 ins. diam., bears N.  $59^{\circ}$  W., 134 lks.  
dist., mkd. T 37 S R 29 E S 1 M C B T.

A pine, 8 ins. diam., bears S.  $43\frac{1}{2}^{\circ}$  E., 65 lks.  
dist., mkd. T 37 S R 29 E S 12 M C B T.

Thence, by triangulation, across the waters of Lake  
Sirena.

80.60 Intersect the point for the cor. of secs. 1, 6, 7 and  
12, on the east boundary of the township,  
described in the field notes of the resurvey of  
T. 37 S., R. 30 E., executed by A. N. Kimmell  
and Wm. H. Richards in 1917. This point falls  
in Lake Sirena.

Land, rolling.

Soil, sandy loam; 2nd rate.

Timber, pine.

Undergrowth, oak, hickory and palmetto.

---

From the cor. of secs. 1, 2, 11 and 12.

Thence

West, on true line, bet. secs. 2 and 11.


Over rolling land, through timber and undergrowth.

2.50 Enter grassy dry lake bed, bears NE. and SW.

Dependent Resurvey of a Portion of the Exteriors and  
Subdivisions of T. 37 S., R. 29 E.

## Chains

- 8.75 Leave dry lake bed, bears NE. and SW.  
15.75 Road, bears NE. and SW.  
16.85 Dry drainage ditch, course SW.  
24.18 Intersect the true meander line of Lake Stearns, on  
the SE. side of the Lake.  
Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in  
the ground, with brass cap mkd.



## From which

A pine, 12 ins. diam., bears N. 55° E., 78 lks.  
dist., mkd. T 37 S R 29 E S 2 M C B T.

A pine, 14 ins. diam., bears S. 14½° W., 21 lks.  
dist., mkd. T 37 S R 29 E S 11 M C B T.

Thence, across the waters of Lake Stearns.

- 37.40 The record distance for the meander cor. of sees.  
2 and 11. This point falls in Lake Stearns.

Land, rolling.

Soil, sandy loam; 2nd rate.

Timber, pine.

Undergrowth, oak, hickory and palmetto.

---

From the cor. of sees. 1, 2, 11 and 12.


Thence

N. 0° 13' W., on a true line, bet. sees. 1 and 2.

Over rolling land, through timber and undergrowth.

- 3.00 East end of dry lake, bears W., 25 lks. dist.  
8.00 Road, bears E. and W.  
8.15 Wire fence, bears E. and W.  
28.30 The SE. cor. of I. D. Steele's fenced orange grove,  
bears W., 3.60 chs. dist.  
29.00 Road, bears N. 60° W. and East.  
31.00 I. D. Steele's house, bears W., 6.30 chs. dist.  
40.17 The proportionate point for the ¼ sec. cor.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins.  
in the ground, with brass cap mkd.



Dependent Resurvey of a Portion of the Extérieurs and  
Subdivisions of T. 37 S., R. 29 E.

## Chains

## From which

A pine, 10 ins. diam., bears S.  $33\frac{1}{2}^{\circ}$  E., 101 lks.  
dist., mkd.  $\frac{1}{4}$  S 1 B T.

A pine, 8 ins. diam., bears N.  $52^{\circ}$  W., 91 lks.  
dist., mkd.  $\frac{1}{4}$  S 2 B T.

44.20 Fall 2.60 chs. E. of NE. cor. of I. D. Steele's  
fenced orange grove. Orange grove ends 6.40 chs.  
S. of fence corner.

60.08 Leave timber and undergrowth; enter cleared area,  
bears E. and W.

80.58 The cor. of sees. 1, 2, 35 and 36, on the N. bdy. of  
the township, described in Book "A".

Land, rolling.

Soil, sandy clay loam; 2nd rate.

Timber, pine.

Undergrowth, oak, hickory and palmetto.

---

From the cor. of sees. 25, 26, 35 and 36.

Thence

S.  $89^{\circ} 46'$  W., on true line, bet. sees. 26 and 35.

Over flat woods area.

21.12 Road, bears NE. and SW.

41.18 The proportionate point for the  $\frac{1}{4}$  sec. cor.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins.  
in the ground, with brass cap mkd.

S 26

$\frac{1}{4}$  —————

S 35

1920

## From which

A pine, 12 ins. diam., bears N.  $15\frac{3}{4}^{\circ}$  W., 139 lks.  
dist., mkd.  $\frac{1}{4}$  S 26 B T.

A pine, 12 ins. diam., bears S.  $18\frac{1}{4}^{\circ}$  W., 62 lks.  
dist., mkd.  $\frac{1}{4}$  S 35 B T.

72.20 Road, bears N. and S.

82.37 The original cor. of sees. 26, 27, 34 and 35, which is  
a pine post, 4 ins. square, 16 ins. above ground,  
marked and witnessed as described in the original  
field notes.

Alongside of the old post, I

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins.  
in the ground, with brass cap mkd.



Dependent Resurvey of a Portion of the Exteriors and  
Subdivisions of T. 37 S., R. 29 E.

## Chains

T 37 S	R 29 E
S 27	S 26
S 34	S 35
1920	

From which

The old bearing trees.

A pine, 16 ins. diam., bears N. 35° E., 37 lks.  
dist., mkd. X.

A pine, 13 ins. diam., bears S. 35° E., 40 lks.  
dist., mkd. X.

A pine, 13 ins. diam., bears S. 44° W., 53 lks.  
dist., mkd. X.

A pine, 12 lks. diam., bears N. 2° W., 15 lks.  
dist., mkd. X.

And new bearing trees.

A pine, 18 ins. diam., bears N. 37° E., 41 lks.  
dist., mkd. T 37 S R 29 E S 26 B T.

A pine, 18 ins. diam., bears S. 51° E., 53 lks.  
dist., mkd. T 37 S R 29 E S 35 B T.

A pine, 20 ins. diam., bears S. 49° W., 97 lks.  
dist., mkd. T 37 S R 29 E S 34 B T.

A pine, 18 ins. diam., bears N. 50° W., 126 lks.  
dist., mkd. T 37 S R 29 E S 27 B T.

Land, level.

Soil, sandy; 3rd rate.

Timber, pine.

Undergrowth, palmetto.

Thence

N. 0° 30' E., on a true line, bet. secs. 26 and 27.

Over flat woods area.

39.97 The proportionate point for the  $\frac{1}{2}$  sec. cor.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins.  
in the ground, with brass cap mkd.

S 27	S 26
1920	

From which

A pine, 8 ins. diam., bears N. 34° E., 100 lks.  
dist., mkd.  $\frac{1}{2}$  S 26 B T.

A pine, 20 ins. diam., bears S. 94° W., 66 lks.  
dist., mkd.  $\frac{1}{2}$  S 27 B T.

Dependent Resurvey of a Portion of the Exteriors and  
Subdivisions of T. 37 S., R. 29 E.

## Chains

- 55.45 Road, bears NW. and SE.  
65.34 Intersect SE. shore line of shallow grassy pond.  
67.64 Leave shallow grassy pond, bears NW. and SE.  
79.94 The original cor. of secs. 22, 23, 26 and 27, which  
is a pine post, 4 ins. square, 18 ins. above  
ground, properly marked and witnessed, except that  
the SW. bearing tree is missing.

Alongside of the original post, I

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins.  
in the ground, with brass cap mkd.

T 37 S.	R 29 E
S 22	S 23
S 27	S 26
1920	

From which

The old bearing trees.

A pine, 20 ins. diam., bears N.  $29\frac{1}{2}^{\circ}$  E., 78 lks.  
dist., mkd. X. I remark it T 37 S R 29 E S 23 B T.

A pine, 24 ins. diam., bears S.  $50\frac{1}{2}^{\circ}$  E., 112 lks.  
dist., mkd. X. I remark it T 37 S R 29 E S 26 B T.

A pine, 24 ins. diam., bears N.  $60\frac{3}{4}^{\circ}$  W., 117 lks.  
dist., mkd. X. I remark it T 37 S R 29 E S 22 B T.

And a new bearing tree.

A pine, 24 ins. diam., bears S.  $67^{\circ}$  W., 164 lks.  
dist., mkd. T 37 S R 29 W S 27 B T.

Land, level.

Soil, sandy; 3rd rate.

Timber, pine.

Undergrowth, palmetto.

Thence

N.  $89^{\circ} 35'$  E., on true line, bet. secs. 23 and 26.

Over flat woods area.

- 40.00 The record distance for the  $\frac{1}{4}$  Sec. cor.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins.  
in the ground, with brass cap mkd.

S 23
$\frac{1}{4}$
S 26
1920

From which.

A pine, 12 ins. diam., bears N.  $34\frac{3}{4}^{\circ}$  E., 32 lks.  
dist., mkd.  $\frac{1}{4}$  S 23 B T.

A pine, 8 ins. diam., bears S.  $48^{\circ}$  E., 59 lks.  
dist., mkd.  $\frac{1}{4}$  S 26 B T.

Dependent Resurvey of a Portion of the Extenters and  
Subdivisions of T. 37 S., R. 29 E.

## Chains

73.00 The record distance for the meander cor. of sees.  
23 and 26, on the fictitious meander line of Lake  
Childs.  
Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in  
the ground, with brass cap mkd.

T 37 S  
S 23  
----- M C  
S 26  
R 29 E  
1920

## From which

A pine, 10 ins. diam., bears N.  $26\frac{3}{4}^{\circ}$  W., 257 lks.  
dist., mkd. T 37 S R 29 E S 23 M C B T.

A pine, 10 ins. diam., bears S.  $15^{\circ}$  W., 437 lks.  
dist., mkd. T 37 S R 29 E S 26 M C B T.

80.00 The cor. of sees. 23, 24, 25 and 26.

Land, level.  
Soil, sandy; 3rd rate.  
Timber, pine.  
Undergrowth, oak and palmetto.

---

From the cor. of sees. 22, 23, 26 and 27.

## Thence

N.  $0^{\circ} 06'$  E., on true line, bet. sees. 22 and 23.

Over flat woods area.

9.09 Intersect the south shore line of shallow grassy pond,  
bears E. and W.

Thence across pond, by triangulation.

36.65 Intersect the north shore line of grassy pond, bears  
E. and W.

40.34 The  $\frac{1}{2}$  sec. cor. of sees. 22 and 23, which is an iron  
post, 3 ins. diam., 8 ins. above ground, marked.

T 37 S R 29 E  
           $\frac{1}{2}$   
S 22 | S 23  
      1917

## From which

A pine, 12 ins. diam., bears N.  $37^{\circ}$  W., 63 lks.  
dist., mkd.  $\frac{1}{2}$  S 22 B T.

A pine, 9 ins. diam., bears S.  $23^{\circ}$  E., 27 lks. dist.,  
mkd.  $\frac{1}{2}$  S 23 B T.

This cor. was renewed by A. N. Kimmell and WM. H.  
Richards in 1917.

Dependent Resurvey of a Portion of the Exteriors and  
Subdivisions of T. 37 S., R. 29 E.

Chain

Thence

N.  $1^{\circ} 15'$  W., on true line, bet. sees. 22 and 23.

40.24

The proportionate point for the cor. of sees. 14, 15,  
22 and 23.Set an iron post, 3 ft. long, 2 ins. diam., 28 ins.  
in the ground, with brass cap mkd.

T 37 S	R 29 E
S 15	S 14
<hr/>	
S 22	S 23
1920	

From which

A pine, 8 ins. diam., bears N.  $7\frac{3}{4}^{\circ}$  E., 6.69 chs.  
dist., mkd. T 37 S R 29 E S 14 B T.A pine, 5 ins. diam., bears S.  $67\frac{1}{2}^{\circ}$  E., 129 lks.  
dist., mkd. T 37 S R 29 E S 23 B T.A pine, 4 ins. diam., bears S.  $20\frac{1}{4}^{\circ}$  W., 273 lks. dist.,  
mkd. T 37 S R 29 E S 22 B T.A pine, 5 ins. diam., bears N.  $25\frac{3}{4}^{\circ}$  W., 241 lks. dist.,  
mkd. T 37 S R 29 E S 15 B T.

Land, level.

Soil, sandy; 3rd rate.

Timber, pine.

Undergrowth, palmetto and oak.

Thence

N.  $89^{\circ} 41'$  E., on true line, bet. sees. 14 and 23.

Over rolling land, through dense undergrowth.

40.00

The record distance for the  $\frac{1}{4}$  sec. cor.Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in  
the ground, with brass cap mkd.

S 14
<hr/>
S 23
1920

From which

A pine, 18 ins. diam., bears N.  $7\frac{1}{2}^{\circ}$  W., 53 lks.  
dist., mkd.  $\frac{1}{4}$  S 14 B T.A pine, 7 ins. diam., bears S.  $27^{\circ}$  E., 89 lks.  
dist., mkd.  $\frac{1}{4}$  S 23 B T.

80.00

The cor. of sees. 13, 14, 23 and 24.

Land, rolling.

Soil, sandy loam; 2nd rate.

Timber, pine.

Undergrowth, oak and palmetto.

Dependent Resurvey of a Portion of the Extenters and  
Subdivisions of T. 37 S., R. 29 E.

## Chains

From the cor. of sees. 11, 12, 13 and 14.

Thence

S. 89° 49' W., on true line, bet. sees. 11 and 14.

Over rolling land, through timber and undergrowth.

30.28 Leave rolling land; enter dense bay gall, bears NW.  
and SE.

30.83 Creek, 10 lks. wide, 6 ins. deep, course NW.

31.20 Leave bay gall; re-enter rolling land, bears NW. and  
SE.

40.26 The proportionate point for the  $\frac{1}{2}$  sec. cor.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins.  
in the ground, with brass cap mkd.

S 11

$\frac{1}{4}$  —————

S 14

1920

From which

A pine, 11 ins. diam., bears N. 2 $\frac{1}{2}$ ° E., 104 lks.  
dist., mkd.  $\frac{1}{4}$  S 11 B T.

A pine, 10 ins. diam., bears S. 46° W., 54 lks.  
dist., mkd.  $\frac{1}{4}$  S 14 B T.

41.43 Cat Fish Creek, 10 lks. wide, 10 ins. deep, course  
NR.

80.53 The cor. of sees. 10, 11, 14 and 15, which is an  
iron post, 3 ins. diam., 8 ins. above ground, mkd.  
and witnessed as described in the field notes of  
the resurvey of T. 37 S., R. 30 E., executed by  
A. N. Kimmell and WM. H. Richards in 1917.

From which

The cor. of sees. 14, 15, 22 and 23, bears  
S. 1° 15' E., 80.48 chs. dist.

Land, rolling.

Soil, sandy loam; 2nd rate.

Timber, pine.

Undergrowth, oak, hickory, bay and palmetto.

Thence

North, on a true line, bet. sees. 10 and 11.

Over rolling land, through undergrowth and pine  
timber.

38.20 The record distance for the meander cor. of sees.  
10 and 11, on the fictitious meander line of  
Lake Stearns.

Dependent Resurvey of a Portion of the Exteriors and  
Subdivisions of T. 37 S., R. 29 E.

Chains

Set an iron post, 3 ft. long, 1 in. diam., 28 ins.  
in the ground, with brass cap mkd.

```

      M C
     /  \
    S 10  S 11
   T 37 S R 29 E
      1920
  
```

From which

A pine, 8 ins. diam., bears N.  $76\frac{1}{2}^{\circ}$  W., 168 lks.  
dist., mkd. T 37 S R 29 E S 10 M C B T.

A pine, 16 ins. diam., bears S.  $27\frac{1}{2}^{\circ}$  E., 226 lks.  
dist., mkd. T 37 S R 29 E S 11 M C B T.

40.00

The record distance for the  $\frac{1}{4}$  sec. cor.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in  
the ground, with brass cap mkd.

```

      ↑
     S 10 S 11
      1920
  
```

From which

A pine, 16 ins. diam., bears S.  $59^{\circ}$  W., 99 lks.  
dist., mkd.  $\frac{1}{4}$  S 10 B T.

A pine, 18 ins. diam., bears N.  $42\frac{1}{2}^{\circ}$  E., 61 lks.  
dist., mkd.  $\frac{1}{4}$  S 11 B T.

62.98

Intersect the true meander line of Lake Stearns, on  
the south side of the lake.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins.  
in the ground, with brass cap mkd.

```

      M C
     /  \
    S 10  S 11
   T 37 S R 29 E
      1920
  
```

From which

A pine, 20 ins. diam., bears S.  $29\frac{1}{2}^{\circ}$  W., 51 lks.  
dist., mkd. T 37 S R 29 E S 10 M C B T.

A pine, 8 ins. diam., bears S.  $29\frac{1}{2}^{\circ}$  E., 62 lks.  
dist., mkd. T 37 S R 29 E S 11 M C B T.

Land, rolling.

Soil, sandy; 3rd rate.

Timber, pine.

Undergrowth, oak and palmetto.

---

From the cor. of secs. 10, 11, 14 and 15.

Thence

N.  $89^{\circ} 03'$  W., on a true line, bet. secs. 10 and 15.

Over flat woods area.

Dependent Resurvey of a Portion of the Exteriors and  
Subdivisions of T. 37 S., R. 29 E.

## Chains

40.90 The proportionate point for the  $\frac{1}{2}$  sec. cor.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins.  
in the ground, with brass cap mkd.

S 10  
—  
S 15  
1920

## From which

A pine, 8 ins. diam., bears N.  $27\frac{3}{4}^{\circ}$  E., 132 lks.  
dist., mkd.  $\frac{1}{2}$  S 10 B T.

A pine, 6 ins. diam., bears S.  $2\frac{1}{2}^{\circ}$  E., 133 lks.  
dist., mkd.  $\frac{1}{2}$  S 15 B T.

71.80 Enter shallow grassy pond, bears NW. and S.

81.80 Intersect the local cor. of sees. 9, 10, 15 and 16,  
which is a post, 4 ins. square, 18 ins. above  
ground which is probably the remains of the original  
cor. properly mkd.

Alongside of the local post, I

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins.  
in the ground, with brass cap mkd.

T 37 S R 29 E  
S 9 S 10  
—  
S 16 S 15  
1920

## From which

A pine, 11 ins. diam., bears N.  $9\frac{1}{2}^{\circ}$  W., 248 lks.  
dist., mkd. T 37 S R 29 E S 9 B T.

No other bearing trees available.

Cor. sets in fence cor.; fences N. and W. from cor.

Land, level.

Soil, sandy; 3rd rate.

Timber, pine.

Undergrowth, oak and palmetto.

## Thence

N.  $1^{\circ} 41'$  W., on a true line, bet. sees. 9 and 10.

Through shallow grassy pond, along wire fence.

2.30 Leave grassy pond; enter flat woods, bears E. and W.

16.75 Road, bears E. and W.

24.60 Road, bears NW. and SE.

40.30 Intersect the local  $\frac{1}{2}$  sec. cor., which is a post,  
3 ins. square, 12 ins. above ground, properly mkd.,  
probably occupies the original cor. position.

Dependent Resurvey of a Portion of the Exteriors and  
Subdivisions of T. 37 S., R. 29 E.

## Chains

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in  
the ground, with brass cap mkd.



From which

A pine, 12 ins. diam., bears S.  $38\frac{1}{2}^{\circ}$  W., 131 lks.  
dist., mkd.  $\frac{1}{2}$  S 9 B T.

A pine, 12 ins. diam., bears S.  $16\frac{1}{2}^{\circ}$  E., 249 lks.  
dist., mkd.  $\frac{1}{4}$  S 10 B T.

Thence

N.  $1^{\circ} 45'$  W., on true line, bet. sees. 9 and 10.

Over flat woods area, along wire fence.


40.27

Intersect the local cor. of sees. 3, 4, 9 and 10,  
which is a post, 4 ins. square, 18 ins. above  
ground, properly mkd.

This cor. was obviously established as near the true  
proportionate position as the local surveyor  
could determine from the few remaining original  
corners in this region.

Alongside of the local cor., I

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins.  
in the ground, with brass cap mkd.



From which

A pine, 6 ins. diam., bears N.  $24\frac{1}{2}^{\circ}$  E., 35 lks.  
dist., mkd. T 37 S R 29 E S 3 B T.

A pine, 15 ins. diam., bears S.  $35\frac{1}{2}^{\circ}$  E., 112 lks.  
dist., mkd. T 37 S R 29 E S 10 B T.

A pine, 10 ins. diam., bears S  $76\frac{1}{2}^{\circ}$  W., 42 lks. dist.,  
mkd. T 37 S R 29 E S 9 B T.

A pine, 6 ins. diam., bears N.  $8^{\circ}$  W., 58 lks. dist.,  
mkd. T 37 S R 29 E S 4 B T.

Land, level.

Soil, sandy; 3rd rate.

Timber, pine.

Undergrowth, oak and palmetto.

Thence

East, on true line, bet. sees. 3 and 10.

over flat woods and low rolling scrub covered area.



Dependent Resurvey of a Portion of the Exteriors and  
Subdivisions of T. 37 S., R. 29 E.

## Chains

23.50

The record distance for the meander cor. of secs.  
3 and 10, on the fictitious meander line of Lake  
Stearns on the SW. side of the lake.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in  
the ground, with brass cap mkd.

T 37 S	/ M C
S 3	
S 10	
R 29 E	
1920	

From which

A pine, 8 ins. diam., bears N.  $79\frac{1}{2}^\circ$  W., 75 lks.  
dist., mkd. T 37 S R 29 E S 3 M C B T.

A pine, 8 ins. diam., bears S.  $40\frac{1}{2}^\circ$  W., 50 lks.  
dist., mkd. T 37 S R 29 E S 10 M C B T.

40.00

Set an iron post, 3 ft. long, 1 in. diam., 28 ins.  
in the ground, for the  $\frac{1}{2}$  sec. cor., with brass  
cap mkd.

S 3	—
S 10	
1920	

From which

A pine, 12 ins. diam., bears N.  $61^\circ$  W., 50 lks.  
dist., mkd.  $\frac{1}{2}$  S 3 B T.

A pine, 12 ins. diam., bears S.  $70\frac{1}{2}^\circ$  E., 126 lks.  
dist., mkd.  $\frac{1}{2}$  S 10 B T.

48.75

Creek, 3 lks. wide, 6 ins. deep, course N.

51.30

Intersect the true meander line of Lake Stearns, on the  
SW. side of the lake.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in  
the ground, with brass cap mkd.

T 37 S	/ M C
S 3	
S 10	
R 29 E	
1920	

From which

A pine, 12 ins. diam., bears N.  $68\frac{1}{2}^\circ$  W., 98 lks.  
dist., mkd. T 37 S R 29 E S 3 M C B T.

A pine, 12 ins. diam., bears S.  $17^\circ$  W., 21 lks.  
dist., mkd. T 37 S R 29 E S 10 M C B T.

Land, slightly rolling.

Soil, sandy; 3rd rate.

Timber, pine.

Undergrowth, oak and palmetto.

Dependent Resurvey of a Portion of the Exteriors and  
Subdivisions of T. 37 S., R. 29 E.

## Chains

From the cor. of sees. 3, 4, 9 and 10.

Thence

N.  $1^{\circ} 05'$  W., on true line, bet. sees. 3 and 4.

Over slightly rolling land, through timber and  
undergrowth, along wire fence.


3.00 Leave rolling land; enter bay gall swamp, bears NE. and  
SW.

14.00 Leave bay gall; re-enter rolling scrub covered area,  
bears NW. and SE.

40.20 Intersect the local  $\frac{1}{2}$  sec. cor., which is a pine post,  
3 ins. square, 14 ins. above ground, properly mkd.  
I except this cor. as occupying as near as could  
be determined by the local surveyor the proper  
position with respect to the few original cors.  
still extant in this township.

Alongside of the local cor., I

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in  
the ground, with brass cap mkd:



From which

A pine, 8 ins. diam., bears S.  $47\frac{1}{2}^{\circ}$  E., 28 lks.  
dist., mkd.  $\frac{1}{2}$  S 3 B T.


A pine, 10 ins. diam., bears N.  $60\frac{1}{2}^{\circ}$  W., 95 lks.  
dist., mkd.  $\frac{1}{2}$  S 4 B T.

I continue course and measurement, along wire fence.

51.00 Intersect the local meander cor. of sees. 3 and 4,  
on the fictitious meander line of Lake Stearns,  
which is a pine post, 4 ins. square, 14 ins. above  
ground. As the local surveyor established this cor.  
at record distance from the  $\frac{1}{2}$  sec. cor., I accept  
this local cor. position.

Alongside the local cor., I

Set an iron post, 3 ft. long, 1 in. diam., 28 ins.  
in the ground, with brass cap mkd.



From which

A pine, 8 ins. diam., bears S.  $57^{\circ}$  E., 129 lks.  
dist., mkd. T 37 S R 29 E S 3 M C B T.

A pine, 7 ins. diam., bears S.  $41\frac{1}{2}^{\circ}$  W., 89 lks.  
dist., mkd. T 37 S R 29 E S 4 M C B T.

Dependent Resurvey of a Portion of the Exterior and  
Subdivisions of T. 37 S., R. 29 E.

## Chains

Thence


North, on true line, bet. sees. 3 and 4.

Wire fence bears off to West of line.

6.20 Leave rolling land; enter bay gall, bears NW. and  
SE.

16.69 Intersect the true meander line of Lake Stearns, on  
the SW. side of the lake.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in  
the ground, with brass cap mkd.



From which

A pine, 12 ins. diam., bears S.  $16\frac{3}{4}^\circ$  E., 21 lks.  
dist., mkd. T 37 S R 29 E S 3 M C B T.

A pine, 16 ins. diam., bears N.  $41\frac{1}{4}^\circ$  W., 258 lks.  
dist., mkd. T 37 S R 29 E S 4 M C B T.

Land, part level, part rolling.

Soil, part sandy, part sandy muck; 3rd rate.

Timber, pine.

Undergrowth, oak, bay and palmetto.

From the cor. of sees. 3, 4, 9 and 10.

Thence

N.  $89^\circ 51'$  W., on true line, bet. sees. 4 and 9.


Over slightly rolling land, through timber and  
undergrowth.

9.50 Leave rolling land; enter bay gall swamp, bears NE.  
and SW.

19.40 Leave bay gall swamp; enter flat woods area, bears  
N.  $30^\circ$  W. and S.  $30^\circ$  E.

41.27 The proportionate point for the  $\frac{1}{4}$  sec. cor.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in  
the ground, with brass cap mkd.



From which

A pine, 10 ins. diam., bears N.  $9^\circ$  E., 128 lks.  
dist., mkd.  $\frac{1}{4}$  S 4 B T.

A pine, 11 ins. diam., bears S.  $7\frac{3}{4}^\circ$  W., 151 lks.  
lks. dist., mkd.  $\frac{1}{4}$  S 9 B T.

Dependent Resurvey of a Portion of the Extentors and  
Subdivisions of T. 37 S., R. 29 E.

## Chains

- 82.00 Road, bears NW. and SE.  
82.54 The proportionate point for the cor. of sees. 4, 5, 8  
and 9.  
Set an iron post, 3 ft. long, 2 ins. diam., 28 ins.  
in the ground, with brass cap mkd.

T 37 S	R 29 E
S 5	S 4
S 8	S 9
1920	

## From which

A pine, 22 ins. diam., bears N.  $46\frac{1}{2}^{\circ}$  E., 62 lks.  
dist., mkd. T 37 S R 29 E S 4 B T.

A pine, 15 ins. diam., bears S.  $39^{\circ}$  E., 78 lks.  
dist., mkd. T 37 S R 29 E S 9 B T.

A pine, 12 ins. diam., bears S.  $33\frac{3}{4}^{\circ}$  W., 142 lks.  
dist., mkd. T 37 S R 29 E S 8 B T.

A pine, 20 ins. diam., bears N.  $57\frac{1}{2}^{\circ}$  W., 80 lks.  
dist., mkd. T 37 S R 29 E S 5 B T.

The cor. of sees. 4, 5, 32 and 33, on the S. bdy.  
of the township, bears S.  $1^{\circ} 47'$  E., 401.80 chs.  
dist.

Land, level.

Soil, sandy; 3rd rate.

Timber, pine.

Undergrowth, oak, bay and palmetto.

## Thence

N.  $0^{\circ} 22'$  E., on true line, bet. sees. 4 and 5.

Over flat woods area.

- 0.50 Road, bears NW. and SE.  
17.56 Leave flat woods; enter grassy prairie, bears NE.  
and SW.  
23.36 Leave prairie; re-enter flat woods, bears NW. and SE.  
40.16 The proportionate point for the  $\frac{1}{2}$  sec. cor.  
Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in  
the ground, with brass cap mkd.

$\frac{1}{2}$	
S 5	S 4
1920	

## From which

A pine, 8 ins. diam., bears N.  $56\frac{1}{2}^{\circ}$  E., 75 lks.  
dist., mkd.  $\frac{1}{2}$  S 4 B T.

A pine, 12 ins. diam., bears N.  $50\frac{1}{2}^{\circ}$  W., 190 lks.  
dist., mkd.  $\frac{1}{2}$  S 5 B T.

Dependent Resurvey of a Portion of the Exteriors and  
Subdivisions of T. 37 S., R. 29 E.

## Chains

52.30 Leave flat woods; enter grassy prairie, bears E. and W.

68.15 Leave prairie; re-enter flat woods, bears E. and W.

80.58 The cor. of secs. 4, 5, 32 and 33, on the North boundary of the township, described in Book "A".

Land, level.

Soil, sandy; 3rd rate.

Timber, pine.

Undergrowth, oak and palmetto.

From the cor. of secs. 4, 5, 8 and 9.

Thence

N. 89° 14' W., on a true line, bet. secs. 5 and 8.

Over flat woods area.

9.70 Road, bears NW. and SE.

41.04 The proportionate point for the  $\frac{1}{2}$  sec. cor.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, with brass cap mkd.

S 5  
—  
S 8  
1920

From which

A pine, 8 ins. diam., bears N. 55° E., 42 lks. dist., mkd.  $\frac{1}{4}$  S 5 B T.

A pine, 8 ins. diam., bears S. 55 $\frac{1}{2}$ ° E., 37 lks. dist., mkd.  $\frac{1}{4}$  S 8 B T.

46.00 Leave flat woods; enter shallow grassy pond, bears NW. and SE.

57.00 Leave pond; re-enter flat woods, bears NE. and SW.

66.30 Road, from Hen Scratch to Arcadia, Fla., bears N. and S.

82.07 The point for the cor. of secs. 5, 6, 7 and 8, as determined by the original bearing trees.

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, with brass cap mkd.

T 37 S R 29 E  
S 6 | S 5  
—  
S 7 | S 8  
1920

From which

The old bearing trees.

Dependent Resurvey of a Portion of the Exterior and  
Subdivisions of T. 37 S., R. 29 E.

## Chains

A pine stump, bears N.  $63^{\circ}$  E., 65 lks. dist.

A pine, 8 ins. diam., bears S.  $12\frac{1}{2}^{\circ}$  E., 73 lks. dist., mkd. X. I remark it T 37 S R 29 E S 8 B T.

A pine, 8 ins. diam., bears S.  $18\frac{1}{2}^{\circ}$  W., 129 lks. dist., mkd. X. I remark it T 37 S R 29 E S 7 B T.

A pine, 26 ins. diam., bears N.  $5\frac{1}{2}^{\circ}$  W., 18 lks. dist., mkd. X. I remark it T 37 S R 29 E S 6 B T.

And a new bearing tree.

A pine, 16 ins. diam., bears N.  $16\frac{1}{2}^{\circ}$  E., 187 lks. dist., mkd. T 37 S R 29 E S 5 B T.

Land, level.

Soil, sandy; 3rd rate.

Timber, pine.

Undergrowth, palmetto.

## Thence


N.  $0^{\circ}$   $58'$  E., on a true line, bet. secs. 5 and 6.

Over flat woods area.

39.25 Intersect the original  $\frac{1}{2}$  sec. cor., which is a pine post, 3 ins. square, 12 ins. above ground, mkd.  $\frac{1}{2}$  S on W. face.

Alongside the old post, I

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, with brass cap mkd.



From which

The new bearing trees.

A pine, 16 ins. diam., bears N.  $86\frac{1}{2}^{\circ}$  E., 171 lks. dist., mkd.  $\frac{1}{2}$  S 5 B T.

A pine, 11 ins. diam., bears S.  $84\frac{1}{2}^{\circ}$  W., 153 lks. dist., mkd.  $\frac{1}{2}$  S 6 B T.

There are no original bearing trees remaining.

## Thence

N.  $0^{\circ}$   $52'$  E., on true line, bet. secs. 5 and 6.

Over flat woods area.

40.24 The cor. of secs. 5, 6, 31 and 32, on the N. bdy. of the township described in Book "A".

Land, level.

Soil, sandy; 3rd rate.

Timber, pine.

Undergrowth, palmetto.

Dependent Resurvey of a Portion of the Extentors and  
Subdivisions of T. 37 S., R. 29 E.

Chains

Notes of the Adjusted Fictitious Meander Lines of  
Lakes Shown on the Original Plat.

In order to determine the position of the fictitious meander lines of lakes in this township, as shown on the original plat, I calculate the latitudes and departures as returned in the field notes and distribute the closing errors, thereof, each in proportion to the lengths of the original courses, with resulting courses and distances as hereinafter recorded.

Notes of the Adjusted fictitious meander lines of  
Lake Sirena.

I commence at the west meander cor. of sees. 1 and 12,  
on the fictitious meander line of Lake Sirena.

Thence with adjusted fictitious meanders of Lake  
Sirena, through sec. 12.

Over rolling land, through undergrowth and scattering  
timber.

S. 0° 07' E., 4.96 chs.

4.96 The proportionate point for angle point No. 1.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins.  
in the ground, with brass cap mkd.

T 37 S  
R 29 E  
S 12  
AP 1  
1920

From which

A pine, 10 ins. diam., bears S. 82½° W., 307 lks.  
dist., mkd. AP 1 S 12 B T.

No other bearing trees available.

Thence

S. 26° 16' E., 15.91 chs.

15.91 The proportionate point for angle point No. 2.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins.  
in the ground, with brass cap mkd.

T 37 S  
R 29 E  
S 12  
AP 2  
1920

From which

A pine, 4 ins. diam., bears S. 32½° E., 101 lks.  
dist., mkd. AP 2 S 12 B T.

No other bearing trees available.

Dependent Resurvey of a Portion of the Exterior and  
Subdivisions of T. 37 S., R 29 E.

Chains

Thence

S. 86° 25' E., 24.03 chs.

24.03

The proportionate point for angle point No. 3.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, with brass cap mkd.

T 37 S  
 R 29 E  
 AP 3  
 S 12  
 1920

From which

A pine, 8 ins. diam., bears N. 49½° W., 235 lks. dist., mkd. AP 3 S 12 B T.

No other bearing trees available.

Thence

N. 4° 19' E., 20.86 chs.

13.90

Road, bears N. 60° W., and S. 60° E.

15.20

Intersect the true meander line of Lake Sirena, on the south side of the lake.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for witness cor. to the meander cor. of sees. 1 and 12, on the fictitious meander line of Lake Sirena, with brass cap mkd.

W C  
 T 37 S  
 S 1  
 M C  
 S 12  
 R 29 E  
 1920

From which

A pine, 6 ins. diam., bears S. 32½° E., 115 lks. dist., mkd. W C T 37 S R 29 E S 12 M C B T.

A pine, 8 ins. diam., bears N. 71½° E., 103 lks. dist., mkd. W C T 37 S R 29 E S 12 M C B T.

Thence across the waters of Lake Sirena.

20.86

Intersect the point for the meander cor. of sees. 1 and 12, on the east side of the fictitious meander line of Lake Sirena. This point falls in lake.

Land, rolling.

Soil, sandy loam; 2nd rate.

Timber, pine.

Undergrowth, oak, hickory and palmetto.



Dependent Resurvey of a Portion of the Exterior and  
Subdivisions of T. 37 S., R. 29 E.

## Chains

Thence with Adjusted fictitious meanders of Lake  
Sirena, through sec. 1.

Across the waters of Lake Sirena.

N. 17° 59' W., 12.05 chs.

12.05 The proportionate point for angle point No. 1, falls  
in Lake Sirena.

Thence

N. 37° 52' W., 21.20 chs.


21.20 The proportionate point for angle point No. 2, falls  
in lake.

Thence

N. 67° 30' W., 15.23 chs.

5.20 Intersect the true meander line of Lake Sirena on the  
NW. side of the lake.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins.  
in the ground, for witness cor. to angle point No. 2,  
with brass cap mkd.



From which

A pine, 10 ins. diam., bears N. 17½° E., 316 lks.  
dist., mkd. W C AP 2 S 1 B T.

An oak, 6 ins. diam., bears S. 58½° W., 82 lks.  
dist., mkd. W C AP 2 S 1 B T.

Thence over rolling land, through undergrowth and  
timber; ascend sandy bank.

5.70 Road, bears NE. and SE.

5.90 Wire fence, bears NE. and SW.

6.03 Top of sandy bench, bears NE. and SE.

15.23 The proportionate point for angle point No. 3.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in  
the ground, with brass cap mkd.



From which

A hickory, 8 ins. diam., bears N. 10½° W., 208 lks.  
dist., mkd. AP 3 S 1 B T.

Dependent Resurvey of a Portion of the Exterior and  
Subdivisions of T. 37 S., R. 29 E.

## Chains

Thence

S. 10° 58' W., 24.13 chs.

17.43 Wire fence, bears NE. and SW.

17.53 Road, bears NE. and SE.

Descend 20 ft. over sandy S. slope.

22.73 Enter shallow grassy pond, bears E. and SW.

24.13 The proportionate point for angle point No. 4.

Set an iron post, 3 ft. long, 1 in. diam., 28 inss. in  
the ground, with brass cap mkd.

T 37 S  
S 1 AP 4  
R 29 E  
1920

From which

A pine, 8 ins. diam., bears N. 88° W., 452 lks.  
dist., mkd. AP 4 S 1 B T.

Thence

S. 15° E., 10.78 chs.

Across shallow grassy pond.

6.78 Leave grassy pond, thence over rolling land, bears  
NW. and N. 60° E.

7.30 Road, bears E. and W.

10.78 The west meander cor. of sees. 1 and 12, on the  
fictitious meander line of Lake Sirena, the place  
of beginning.

Land, rolling.

Soil, sandy clay loam; 2nd rate.

Timber, pine.

Undergrowth, oak, hickory and palmetto.

Notes of the Adjusted Fictitious Meander Line of  
Lake Stearns.

I commence at the meander cor. of sees. 4 and 33, on  
the N. bdy. of the township on the west side of  
Lake Stearns, which is a common meander cor. for  
both the true and the fictitious meander lines  
of Lake Stearns, described in Book "A".

Thence with adjusted fictitious meanders of Lake  
Stearns, through see. 4.

Through bay gall swamp.

S. 22° 20' E., 7.21 chs.

Dependent Resurvey of a Portion of the Exterior and  
Subdivisions of T. 37 S., R 29 E.

## Chains

7.21

The proportionate point for angle point No. 1.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins.  
in the ground, with brass cap mkd.

T 37 S  
S 4  
R 29 E } AP 1  
1920

From which

A pine, 10 ins. diam., bears S.  $45\frac{1}{2}^{\circ}$  E., 159 lks.  
dist., mkd. AP 1 S 4 B T.

A pine, 12 ins. diam., bears S.  $77\frac{1}{2}^{\circ}$  W., 67 lks.  
dist., mkd. AP 1 S 4 B T.

Thence

S.  $4^{\circ} 09'$  W., 11.19 chs.

11.19

The proportionate point for angle point No. 2.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in  
the ground, with brass cap mkd.

T 37 S  
S 4  
R 29 E } AP 2  
1920

From which

A pine, 12 ins. diam., bears S.  $45\frac{1}{2}^{\circ}$  E., 57 lks.  
dist., mkd. AP 2 S 4 B T.

A pine, 8 ins. diam., bears N.  $23\frac{1}{2}^{\circ}$  W., 105 lks. dist.,  
mkd. AP 2 S 4 B T.

Thence

S.  $19^{\circ} 19'$  E., 12.33 chs.

4.20

Leave bay gall; enter flat woods, bears NW. and SE.

12.33

Intersect the meander cor. of sees. 3 and 4, on the  
fictitious meander line of Lake Stearns.

Land, level.

Soil, sandy and sandy musk; 3rd rate.

Timber, pine.

Undergrowth, oak, palmetto and bay.

Thence with adjusted fictitious meanders of Lake  
Stearns, through see. 3.

Over rolling land, through timber and undergrowth.

S.  $19^{\circ} 08'$  E., 13.09 chs.

13.09

The proportionate point for angle point No. 1.

Dependent Resurvey of a Portion of the Exteriors and  
Subdivisions of T. 37 S., R. 29 E.

## Chains

Set an iron post, 3 ft. long, 1 in. diam., 28 ins.  
in the ground, with brass cap mkd.

T 37 S  
R 29 E  
S 3  
AP 1  
1920

From which

A pine, 14 ins. diam., bears S.  $89\frac{1}{2}^{\circ}$  E., 179 lks.  
dist., mkd. AP 1 S 3 B T.

Thence

S.  $0^{\circ} 47'$  E., 11.04 chs.

11.04 The proportionate point for angle point No. 2.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in  
the ground, with brass cap mkd.

T 37 S  
R 29 E  
S 3  
AP 2  
1920

From which

A pine, 12 ins. diam., bears N.  $28\frac{1}{2}^{\circ}$  E., 119 lks.  
dist., mkd. AP 2 S 3 B T.

A pine, 6 ins. diam., bears S.  $24\frac{1}{2}^{\circ}$  W., 136 lks.  
dist., mkd. AP 2 S 3 B T.

Thence

S.  $44^{\circ} 24'$  E., 17.19 chs.

3.80 Creek, 5 lks. wide, 6 ins. deep, course NE.

17.19 The proportionate point for angle point No. 3.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins.  
in the ground, with brass cap mkd.

T 37 S  
R 29 E  
S 3  
AP 3  
1920

From which

A pine, 8 ins. diam., bears S.  $88\frac{1}{2}^{\circ}$  E., 139 lks.  
dist., mkd. AP 3 S 3 B T.

A pine, 10 ins. diam., bears S.  $46\frac{1}{2}^{\circ}$  W., 100 lks.  
dist., mkd. AP 3 S 3 B T.

Thence

S.  $21^{\circ} 40'$  E., 9.07 chs.

9.07 The proportionate point for angle point No. 4.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins.  
in the ground, with brass cap mkd.

Dependent Resurvey of a Portion of the Exteriors and  
Subdivisions of T. 37 S., R 29 E.

Chains

T 37 S  
R 29 E  
S 3  
1920  
AP 4

From which

A pine, 6 ins. diam., bears N.  $65\frac{1}{2}^{\circ}$  E., 132 lks.  
dist., mkd. AP 4 S 3 B T.

A pine, 10 ins. diam., bears N.  $72\frac{1}{2}^{\circ}$  W., 113 lks.  
dist., mkd. AP 4 S 3 B T.

Thence

S.  $34^{\circ} 02'$  E., 8.29 chs.

8.29 Intersect the meander cor. of sees. 3 and 10, on the  
fictitious meander line of Lake Stearns.

Land, rolling.  
Soil, sandy; 3rd rate.  
Timber, pine.  
Undergrowth, oak and palmetto.

Thence with adjusted fictitious meanders of Lake  
Stearns, through sec. 10.

Over slightly rolling land and flat woods.

S.  $30^{\circ} 55'$  E., 7.36 chs.

7.36 The proportionate point for angle point No. 1.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins.  
in the ground, with brass cap mkd.

T 37 S  
R 29 E  
S 10  
1920  
AP 1

From which

A pine, 10 ins. diam., bears N.  $56\frac{1}{2}^{\circ}$  E., 242 lks.  
dist., mkd. AP 1 S 10 B T.

A pine, 7 ins. diam., bears S.  $52\frac{1}{2}^{\circ}$  W., 47 lks.  
dist., mkd. AP 1 S 10 B T.

Thence

S.  $47^{\circ} 02'$  E., 22.26 chs.

12.90 Creek, .4 lks. wide, 6 ins. deep, course NE.

22.26 The proportionate point for angle point No. 2.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins.  
in the ground, with brass cap mkd.

Dependent Resurvey of a Portion of the Exteriors and  
Subdivisions of T. 37 S., R. 29 E.

Chains

AP 2  
T 37 S  
R 29 E S 10  
1920

From which

A pine, 10 ins. diam., bears S.  $67\frac{1}{2}^{\circ}$  E., 133 lks.  
dist., mkd. AP 2 S 10 B T.

A pine, 10 ins. diam., bears N.  $83\frac{1}{2}^{\circ}$  W., 142 lks.  
dist., mkd. AP 2 S 10 B T.

Thence

N.  $64^{\circ} 50'$  E., 12.46 chs.

12.46

The proportionate point for angle point No. 3.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins.  
in the ground, with brass cap mkd.

AP 3  
T 37 S  
R 29 E  
S 10  
1920

From which

A pine, 12 ins. diam., bears S.  $31\frac{1}{2}^{\circ}$  W., 231 lks.  
dist., mkd. AP 3 S 10 B T.

A pine, 12 ins. diam., bears S.  $70\frac{1}{2}^{\circ}$  W., 132 lks.  
dist., mkd. AP 3 S 10 B T.

Thence

S.  $27^{\circ} 08'$  E., 13.64 chs.

13.64

The proportionate point for angle point No. 4.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins.  
in the ground, with brass cap mkd.

T 37 S  
R 29 E  
S 10  
1920  
AP 4

From which

A pine, 6 ins. diam., bears N.  $34\frac{1}{2}^{\circ}$  E., 72 lks.  
dist., mkd. AP 4 S 10 B T.

A pine, 7 ins. diam., bears N.  $87^{\circ}$  W., 80 lks.  
dist., mkd. AP 4 S 10 B T.

Thence

S.  $11^{\circ} 51'$  E., 11.40 chs.

3.90

Road, bears NE. and SW.

11.40

The proportionate point for angle point No. 5.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in  
the ground, with brass cap mkd.

Dependent Resurvey of a Portion of the Exterior and  
Subdivisions of T. 37 S., R. 29 E.

Chains

T 37 S  
R 29 E  
S 10  
AP 5  
1920

From which

A pine, 8 ins. diam., bears N.  $75\frac{1}{2}^{\circ}$  E., 300 lks.  
dist., mkd. AP 5 S 10 B T.

A pine, 8 ins. diam., bears S.  $72\frac{3}{4}^{\circ}$  W., 200 lks.  
dist., mkd. AP 5 S 10 B T.

Thence

S.  $78^{\circ} 36'$  E., 21.21 chs.

21.21 Intersect the meander cor. of secs. 10 and 11, on  
the fictitious meander line of Lake Stearns.

Land, slightly rolling land.  
Soil, sandy; 3rd rate.  
Timber, pine.  
Undergrowth, oak and palmetto.

---

Thence with adjusted fictitious meanders of Lake  
Stearns, through sec. 11.

Over gently rolling land, through timber and  
undergrowth.

N.  $17^{\circ} 21'$  E., 5.03 chs.

5.03 The proportionate point for angle point No. 1

Set an iron post, 3 ft. long, 1 in. diam., 28 ins.  
in the ground, with brass cap mkd.

AP 1  
T 37 S  
R 29 E  
S 11  
1920

From which

A pine, 14 ins. diam., bears N.  $24\frac{3}{4}^{\circ}$  W., 147 lks.  
dist., mkd. AP 1 S 11 B T.

A pine, 16 ins. diam., bears S.  $65\frac{1}{2}^{\circ}$  E., 145 lks.  
dist., mkd. AP 1 S 11 B T.

Thence

N.  $36^{\circ} 20'$  E., 8.02 chs.

8.02 The proportionate point for angle point No. 2.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in  
the ground, with brass cap mkd.

AP 2  
T 37 S  
R 29 E  
S 11  
1920

Dependent Resurvey of a Portion of the Exteriors and  
Subdivisions of T. 37 S., R. 29 E.

## Chains

## From which

A pine, 14 ins. diam., bears N.  $1\frac{1}{2}^{\circ}$  W., 212 lks.  
dist., mkd. AP 2 S 11 B T.

A pine, 14 ins. diam., bears S.  $32\frac{3}{4}^{\circ}$  E., 166 lks.  
dist., mkd. AP 2 S 11 B T.

## Thence

N.  $71^{\circ} 15'$  E., 3.98 chs.

3.98 The proportionate point for angle point No. 3.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins.  
in the ground, with brass cap mkd.

AP 3  
T 37 S  
R 29 E  
S 11  
1920

## From which

A pine, 10 ins. diam., bears N.  $16\frac{1}{2}^{\circ}$  E., 69 lks.  
dist., mkd. AP 3 S 11 B T.

A pine, 16 ins. diam., bears S.  $30\frac{1}{2}^{\circ}$  W., 67 lks.  
dist., mkd. AP 3 S 11 B T.

## Thence

N.  $89^{\circ} 30'$  E., 26.80 chs.

2.00 Leave rolling land; enter bay gall swamp, bears N. and S.

20.00 Set fish creek, 10 lks. wide, 8 ins. deep, course N.  
for 1 ch., then NW. Leave bay gall; re-enter  
rolling land, bears N. and S.

26.80 The proportionate point for angle point No. 4.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in  
the ground, with brass cap mkd.

AP 4 T 37 S  
R 29 E  
S 11  
1920

## From which

A pine, 5 ins. diam., bears N.  $58^{\circ}$  E., 348 lks.  
dist., mkd. AP 4 S 11 B T.

A pine, 5 ins. diam., bears N.  $1\frac{1}{2}^{\circ}$  W., 134 lks.  
dist., mkd. AP 4 S 11 B T.

## Thence

N.  $9^{\circ} 30'$  E., 30.05 chs.

6.50 Road, bears E. and W.



Dependent Resurvey of a Portion of the Exterior and  
Subdivisions of T. 37 S., R. 29 E.

## Chains

18.57 Intersect the true meander line of Lake Stearns, on  
the south end of the lake.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in  
the ground, for witness cor. to the meander cor.  
of sees. 2 and 11, on the fictitious meander line of  
Lake Stearns, with brass cap mkd.

W    C  
      T 37 S  
      S 2  
M C    /  
      S 11  
      R 29 E  
      1920

From which

A pine, 12 ins. diam., bears N.  $71\frac{1}{2}^{\circ}$  E., 57 lks.  
dist., mkd. W C T 37 S R 29 E S 11 M C B T.

A pine, 11 ins. diam., bears S.  $65\frac{1}{2}^{\circ}$  W., 100 lks.  
dist., mkd. W C T 37 S R 29 E S 11 M C B T.

Cor. sets. at S. edge of road, which follows narrow  
sandy beach of lake.

Thence across the waters of Lake Stearns.

30.05 Point for the meander cor. of sees. 2 and 11, on the  
fictitious meander line of Lake Stearns, falls in lake.

Land, partly level, part rolling.  
Soil, sandy and sandy muck; 3rd rate.  
Timber, pine.  
Undergrowth, oak, palmetto and bay.

---

Thence with adjusted fictitious meanders of Lake  
Stearns, through see. 2.

Across the waters of Lake Stearns.

N.  $36^{\circ} 23'$  E., 20.23 chs.

20.23 The proportionate point for angle point No. 1, falls  
in Lake Stearns.

Thence

N.  $23^{\circ} 31'$  E., 17.22 chs.

17.22 The proportionate point for angle point No. 2, falls  
in Lake Stearns.

Thence

N.  $17^{\circ} 37'$  E., 29.41 chs.

5.66 Intersect the true meander line of Lake Stearns, on  
the east side of the lake.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins.  
in the ground, for witness cor. to angle point  
No. 2, with brass cap mkd.

Dependent Resurvey of a Portion of the Exteriors and  
Subdivisions of T. 37 S., R. 29 E.

Chains

AP 2 / T 37 S  
R 29 E  
S 2  
W C  
1920

From which

An oak, 6 ins. diam., bears N.  $86\frac{1}{2}^{\circ}$  E., 122 lks. dist.  
mkd. W C AP 2 S 2 B T.

No other bearing trees available.

Thence over rolling land, through dense undergrowth and  
scattering timber.

- 7.35 Wire fence, bears NW. and SE.; enter cleared land, along  
west edge of orange grove.
- 7.40 End of clearing; enter dense undergrowth, bears E. and  
W.
- 13.49 Wire fence, bears N.  $85\frac{1}{2}^{\circ}$  W. and S.  $85\frac{1}{2}^{\circ}$  E.,
- 13.57 Road, parallel to fence.
- 29.41 The proportionate point for angle point No. 3.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in  
the ground, with brass cap mkd.

AP 3 / T 37 S  
R 29 E  
S 2  
1920

From which

A pine, 10 ind. diam., bears S.  $38^{\circ}$  E., 6 lks. dist.,  
mkd. AP 3 S 2 B T.

A pine, 8 ins. diam., bears N.  $21^{\circ}$  W., 89 lks. dist.,  
mkd. AP 3 S 2 B T.

Cor. is at N. edge of land covered with timber and  
undergrowth.

Thence

N.  $15^{\circ} 54'$  E., 13.40 chs.

Over cleared land, set to young orange grove.

- 13.40 The proportionate point for angle point No. 4.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins.  
in the ground, with brass cap mkd.

AP 4 / T 37 S  
S 2  
R 29 E  
1920

From which

A pine, 8 ins. diam., bears S.  $73\frac{1}{2}^{\circ}$  W., 48 lks. dist.,  
mkd. AP 4 S 2 B T.

Dependent Resurvey of a Portion of the Extenters and  
Subdivisions of T. 37 S., R. 29 E.

## Chains

A pine, 6 ins. diam., bears N.  $17\frac{1}{2}^{\circ}$  W., 166 lks.  
dist., mkd. AP 4 S 2 B T.

Thence

N.  $5^{\circ} 35'$  W., 7.61 chs.

7.61 Intersect the meander cor. of sees. 2 and 35, on the  
N. bdy. of the township on the fictitious meander  
line of Lake Stearns, described in Book "A".

Land, rolling.

Soil, sandy clay loam; 2nd rate.

Timber, pine.

Undergrowth, oak, hickory and palmetto.

Notes of the Adjusted Fictitious Meanders of Lake  
Childs.

I commence at the meander cor. of sees. 31 and 36, on  
the E. bdy. of the township, which is a common  
meander cor. for both the true and the fictitious  
meander lines of Lake Childs, which is an iron  
post, 1 in. diam., 8 ins. above ground, mkd. and  
witnessed as described in the field notes of the  
resurvey of T. 37 S., R. 30 E., executed by  
A. N. Kimmell and Wm. H. Richards, in 1917.

Thence with adjusted fictitious meanders of Lake  
Childs, through sec. 36.

Across the waters of Lake Childs.

N.  $78^{\circ} 12'$  W., 5.97 chs.

5.97 The proportionate point for angle point No. 1, falls  
in lake.

Thence

N.  $61^{\circ} 08'$  W., 7.99 chs.

7.99 The proportionate point for angle point No. 2, falls  
in lake.

Thence

N.  $39^{\circ} 11'$  W., 12.06 chs.

12.06 The proportionate point for angle point No. 3, falls  
in lake.

Thence

N.  $53^{\circ} 37'$  W., 9.30 chs.

9.30 Intersect the point for the meander cor. of sees. 25  
and 36, on the fictitious meander line of Lake  
Childs. This point falls in Lake Childs.

Thence with adjusted fictitious meanders of Lake  
Childs, through sec. 25.

Across the waters of Lake Childs.

Dependent Resurvey of a Portion of the Exteriors and  
Subdivisions of T. 37 S., R 29 E.

## Chains

N. 53° 19' W., 11.19 chs.

11.19 The proportionate point for angle point No. 1, falls  
in Lake.

Thence

N. 68° 04' W., 13.23 chs.

13.23 The proportionate point for angle point No. 2, falls  
in lake.

Thence

N. 57° 17' W., 14.23 chs.

6.97 Intersect the true meander line of Lake Childs, on  
the west side of the lake.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins.  
in the ground, with brass cap mkd.

T 37 S  
R 29 E AP 2  
S 25  
W C  
1920

From which

A pine, 12 ins. diam., bears N. 35½° W., 65 lks.  
dist., mkd. W C AP 2 S 25 B T.

A pine, 8 ins. diam., bears S. 41° W., 23 lks.  
dist., mkd. W C AP 2 S 25 B T.

Thence over flat woods area.

14.23 The proportionate point for angle point No. 3.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins.  
in the ground, with brass cap mkd.

T 37 S  
R 29 E AP 3  
S 25  
1920

From which

A pine, 14 ins. diam., bears N. 33° W., 139 lks.  
dist., mkd. AP 3 S 25 B T.

A pine, 8 ins. diam., bears S. 44° E., 53 lks. dist.,  
mkd. AP 3 S 25 B T.

Thence

N. 32° 39' W., 12.16 chs.

12.16 The proportionate point for angle point No. 4.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins.  
in the ground, with brass cap mkd.

Dependent Resurvey of a Portion of the Exterior and  
Subdivisions of T. 37 S., R. 29 E.

Chains

T 37 S  
R 29 E AP 4  
S 25  
1920

From which

A pine, 10 ins. diam., bears S. 9° W., 106 lks. dist.,  
mkd. AP 4 S 25 B T.

A pine, 12 ins. diam., bears N. 70° E., 119 lks.  
dist., mkd. AP 4 S 25 B T.

Thence

N. 10° 53' W., 21.17 chs.

14.09 Intersect the true meander line of Lake Childs, on  
the west side of the lake.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in  
the ground, for witness cor. to angle point No. 5,  
with brass cap mkd.

W C  
T 37 S  
R 29 E AP 5  
S 25  
1920

From which

A pine, 10 ins. diam., bears S. 26° E., 343 lks.  
dist., mkd. W C AP 5 S 25 B T.

A pine, 12 ins. diam., bears S. 77½° W., 65 lks.  
dist., mkd. W C AP 5 S 25 B T.

Thence across the waters of Lake Childs.

21.17 The proportionate point for angle point No. 5, falls  
in lake.

Thence

N. 37° 51' W., 15.21 chs.

7.01 Intersect the true meander line of Lake Childs on  
the west side of the lake.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in  
the ground, with brass cap mkd.

T 37 S  
R 29 E AP 5  
S 25 W C  
1920

From which

A pine, 12 ins. diam., bears N. 30½° W., 40 lks.  
dist., mkd. W C AP 5 S 25 B T.

Dependent Resurvey of a Portion of the Exterior and  
Subdivisions of T. 37 S., R. 29 E.

## Chains

A pine, 10 ins. diam., bears S.  $14\frac{1}{2}^{\circ}$  E., 280 lks.  
dist., mkd. W C AP 5 S 25 B T.

Thence over flat woods area.

15.21 The meander cor. of sees. 25 and 26, on the  
fictitious meander line of Lake Childs.

Land, level.

Soil, sandy; 3rd rate.

Timber, pine.

Undergrowth, oak and palmetto.

Thence with adjusted fictitious meanders of Lake  
Childs, through sec. 26.

Over flat woods area.

N.  $35^{\circ} 55'$  W., 12.00 chs.

12.00 The proportionate point for angle point No. 1.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in  
the ground, with brass cap mkd.

T 37 S  
R 29 E  
S 26  
AP 1  
1920

From which

A pine, 8 ins. diam., bears N.  $35^{\circ}$  E., 161 lks.  
dist., mkd. AP 1 S 26 B T.

A pine, 10 ins. diam., bears S.  $61^{\circ}$  W., 66 lks. dist.,  
mkd. AP 1 S 26 B T.

Thence

N.  $2^{\circ} 06'$  W., 8.21 chs.

8.21 The meander cor. of sees. 23 and 26, on the fictitious  
meander line of Lake Childs.

Land, level.

Soil, sandy; 3rd rate.

Timber, pine.

Undergrowth, oak and palmetto.

Thence with adjusted fictitious meanders of Lake  
Childs, through sec. 23.

Over gently rolling land, through timber and  
undergrowth.

N.  $4^{\circ} 24'$  W., 4.04 chs.

4.04 The proportionate point for angle point No. 1.

Dependent Resurvey of a Portion of the Exterior and  
Subdivisions of T. 37 S., R 29 E.

## Chains

Set an iron post, 3 ft. long, 1 in. diam., 28 ins.  
in the ground, with brass cap mkd.

T 37 S  
S 23  
R 29 E  
AP 1  
1920

From which

A pine, 8 ins. diam., bears N.  $12^{\circ}$  E., 120 lks.  
dist., mkd. AP 1 S 23 B T.

A pine, 8 ins. diam., bears S.  $68\frac{1}{2}^{\circ}$  E., 166 lks.  
dist., mkd. AP 1 S 23 B T.

Thence

N.  $9^{\circ} 31'$  E., 7.98 chs.

7.98 The proportionate point for angle point No. 2.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in  
the ground, with brass cap mkd.

T 37 S  
R 29 E  
S 23  
AP 2  
1920

From which

A pine, 6 ins. diam., bears N.  $87\frac{1}{2}^{\circ}$  E., 158 lks.  
dist., mkd. AP 2 S 23 B T.

A pine, 12 ins. diam., bears S.  $19^{\circ}$  W., 106 lks.  
dist., mkd. AP 2 S 23 B T.

Thence

N.  $33^{\circ} 42'$  E., 10.49 chs.

10.49 The meander cor. of secs. 23 and 24, on the fictitious  
meander line of Lake Childs.

Land, rolling.

Soil, sandy; 3rd rate.

Timber, pine.

Undergrowth, oak and palmetto.

Thence with the adjusted fictitious meanders of Lake  
Childs, through sec. 24.

Over flat woods area.

N.  $35^{\circ} 28'$  E., 23.99 chs.

11.78 Intersect the true meander line of Lake Childs, on  
the west side of the lake.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in  
the ground, for witness cor. to angle point No. 1,  
with brass cap mkd.

Dependent Resurvey of a Portion of the Exteriors and  
Subdivisions of T. 37 S., R. 29 E.

Chains

T 37 S.  
R 29 E  
S 24  
AP 1  
1920  
W C

From which

A pine, 6 ins. diam., bears N.  $10\frac{1}{2}^{\circ}$  W., 159 lks.  
dist., mkd. W C AP 1 S 24 B T.

No other bearing trees available.

Thence across the waters of Lake Childs.

23.99 The proportionate point for angle point No. 1, falls  
in lake.

Thence

N.  $20^{\circ} 32'$  E., 9.01 chs.

9.01 The proportionate point for angle point No. 2, falls in  
lake.

Thence

N.  $40^{\circ} 11'$  W., 15.13 chs.

9.61 Intersect the true meander line of Lake Childs, on the  
west side of the lake.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in  
the ground, for witness cor. to angle point No. 2,  
with brass cap mkd.

T 37 S  
R 29 E  
S 24  
AP 2  
W C  
1920

From which

A pine, 10 ins. diam., bears N.  $9\frac{1}{2}^{\circ}$  W., 46 lks.  
dist., mkd. W C AP 2 S 24 B T.

A pine, 10 ins. diam., bears S.  $61\frac{1}{2}^{\circ}$  W., 287 lks.  
dist., mkd. W C AP 2 S 24 B T.

Thence over rolling land, through timber and  
undergrowth.

15.13 The proportionate point for angle point No. 3.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in  
the ground, with brass cap mkd.

T 37 S  
S 24  
R 29 E  
AP 3  
1920

From which

A pine, 20 ins. diam., bears S.  $52\frac{1}{2}^{\circ}$  E., 131 lks.  
dist., mkd. AP 3 S 24 B T.



Dependent Resurvey of a Portion of the Exteriors and  
Subdivisions of T. 37 S., R. 29 E.

Chains

A pine, 14 ins. diam., bears N.  $24\frac{1}{2}^{\circ}$  W., 35 lks.  
dist., mkd. AP 3 S 24 B T.

Thence

N.  $11^{\circ} 30'$  E., 10.03 chs.

10.03 The proportionate point for angle point No. 4.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins.  
in the ground, with brass cap mkd.

T 37 S  
R 29 E  
S 24 AP 4  
1920

From which

A pine, 8 ins. diam., bears S.  $44\frac{3}{4}^{\circ}$  E., 27 lks.  
dist., mkd. AP 4 S 24 B T.

A pine, 8 ins. diam., bears N.  $89\frac{1}{2}^{\circ}$  W., 45 lks.  
dist., mkd. AP 4 S 24 B T.

Thence

N.  $16^{\circ} 29'$  E., 10.82 chs.

10.82 The meander cor. of sees. 13 and 24, on the fictitious  
meander line of Lake Childs.

Land, part level, part rolling.

Soil, sandy; 3rd rate.

Timber, pine.

Undergrowth, oak and palmetto.

---

Thence with adjusted fictitious meanders of Lake  
Childs, through see. 13.

Over rolling land, through timber and undergrowth.

N.  $13^{\circ} 27'$  E., 12.03 chs.

12.03 The proportionate point for angle point No. 1.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins.  
in the ground, with brass cap mkd.

T 37 S  
R 29 E  
S 13 AP 1  
1920

From which

A pine, 12 ins. diam., bears S.  $44^{\circ}$  E., 106 lks.  
dist., mkd. AP 1 S 13 B T.

A pine, 16 ins. diam., bears S.  $34\frac{1}{2}^{\circ}$  W., 33 lks.  
dist., mkd. AP 1 S 13 B T.

Thence

N.  $25^{\circ} 25'$  E., 8.04 chs.

8.04 The proportionate point for angle point No. 2.

Dependent Resurvey of a Portion of the Exteriors and  
Subdivisions of T. 37 S., R. 29 E.

Chains

Set an iron post, 3 ft. long, 1 in. diam., 28 ins.  
in the ground, with brass cap mkd.

T 37 S  
R 29 E  
S 13 / AP 2  
1920

From which

A pine, 10 ins. diam., bears S.  $29\frac{1}{2}^{\circ}$  E., 120 lks.  
dist., mkd. AP 2 S 13 B T.

A pine, 6 ins. diam., bears N.  $9\frac{3}{4}^{\circ}$  W., 129 lks.  
dist., mkd. AP 2 S 13 B T.

Thence

N.  $4^{\circ} 27'$  E., 10.06 chs.

10.06 The proportionate point for angle point No. 3.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in  
the ground, with brass cap mkd.

T 37 S  
R 29 E / AP 3  
S 13  
1920

From which

A pine, 20 ins. diam., bears N.  $65^{\circ}$  E., 141 lks.  
dist., mkd. AP 3 S 13 B T.

A pine, 12 ins. diam., bears S.  $77\frac{1}{2}^{\circ}$  W., 175 lks.  
dist., mkd. AP 3 S 13 B T.

Thence

N.  $11^{\circ} 26'$  W., 13.11 chs.

13.11 The proportionate point for angle point No. 4.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins.  
in the ground, with brass cap mkd.

T 37 S  
S 13 / AP 4  
R 29 E  
1920

From which

A pine, 4 ins. diam., bears S.  $77\frac{1}{2}^{\circ}$  E., 54 lks.  
dist., mkd. AP 4 S 13 B T.

A pine, 8 ins. diam., bears N.  $56\frac{1}{2}^{\circ}$  W., 199 lks.  
dist., mkd. AP 4 S 13 B T.

Thence

N.  $12^{\circ} 19'$  E., 7.03 chs.

Dependent Resurvey of a Portion of the Exteriors and  
Subdivisions of T. 37 S., R. 29 E.

## Chains

7.03 The proportionate point for angle point No. 5.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins.  
in the ground, with brass cap mkd.

T 37 S  
R 29 E  
S 13  
1920  
AP 5

From which

A pine, 10 ins. diam., bears S.  $73\frac{1}{2}^{\circ}$  W., 258 lks.  
dist., mkd. AP 5 S 13 B T.

A pine, 10 ins. diam., bears S.  $73\frac{1}{2}^{\circ}$  W., 231 lks.  
dist., mkd. AP 5 S 13 B T.

Thence

N.  $42^{\circ} 23'$  E., 18.99 chs.

18.99 The proportionate point for angle point No. 6.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins.  
in the ground, with brass cap mkd.

T 37 S  
R 29 E  
S 13  
1920  
AP 6

From which

A pine, 5 ins. diam., bears S.  $0^{\circ} 30'$  W., 19 lks.  
dist., mkd. AP 6 S 13 B T.

A pine, 5 ins. diam., bears N.  $86\frac{1}{2}^{\circ}$  W., 61 lks.  
dist., mkd. AP 6 S 13 B T.

Thence

N.  $56^{\circ} 25'$  E., 5.97 chs.

5.97 The proportionate point for angle point No. 7.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins.  
in the ground, with brass cap mkd.

T 37 S  
R 29 E  
S 13  
1920  
AP 7

From which

A pine, 5 ins. diam., bears N.  $51\frac{1}{2}^{\circ}$  W., 61 lks.  
dist., mkd. AP 7 S 13 B T.

No other bearing trees available.

Thence

N.  $49^{\circ} 25'$  E., 7.99 chs.

Dependent Resurvey of a Portion of the Exteriors and  
Subdivisions of T. 37 S., R. 29 E.

## Chains

7.99 The proportionate point for angle point No. 8.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins.  
in the ground, with brass cap mkd.

T 37 S  
R 29 E  
S 13 / AP 8  
1920

No bearing trees available. Pits impractical.

Thence

N. 56° 24' E., 16.45 chs.

16.45 The meander cor. of secs. 12 and 13, on the  
fictitious meander line of Lake Childs.

Land, rolling.

Soil, sandy loam; 2nd rate.

Timber, pine.

Undergrowth, oak, hickory and palmetto.

---

Thence with fictitious meanders of Lake Childs,  
through sec. 12.

Over rolling land, through timber and undergrowth.

N. 55° 35' E., 10.01 chs.

10.01 The proportionate point for angle point No. 1.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins.  
in the ground, with brass cap mkd.

T 37 S  
R 29 E  
S 12 / AP 1.  
1920

From which

A pine, 8 ins. diam., bears S. 13½° E., 270 lks.  
dist., mkd. AP 1 S 12 B T.

A pine, 6 ins. diam., bears S. 87½° W., 245 lks.  
dist., mkd. AP 1 S 12 B T.

Thence

N. 69° 36' E., 7.00 chs.

7.00 The proportionate point for angle point No. 2.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in  
the ground, with brass cap mkd.

S 12  
T 37 S / R 29 E  
AP 2  
1920

Dependent Resurvey of a Portion of the Extérieurs and  
Subdivisions of T. 37 S., R. 29 E.

## Chains

No bearing trees or other accessories available.

Thence

S. 62° 49' E., 9.15 chs.

9.15 Intersect the proportionate point for the meander  
cor. of sees. 7 and 12, on the E. bdy. of the  
township on the fictitious meander line of Lake  
Childs.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins.  
in the ground, with brass cap mkd.

From which

A pine, 8 ins. diam., bears N. 83° E., 208 lks.  
dist., mkd. T 37 S R 30 E S 7 M C B T.

No other bearing trees available.

The section cor. of sees. 7, 12, 13 and 18, bears  
S. 0° 40' E., 3.92 chs. dist.

Land, rolling.

Soil, sandy loam; 2nd rate.

Timber, pine.

Undergrowth, oak, hickory and palmetto.

Notes of the True Meanders of Lake Sirena.

I commence at the meander cor. of sees. 1 and 6, on  
the East bdy. of the township, on the NE. shore  
of Lake Sirena; which is an iron post, marked  
and witnessed as described in the field notes of  
the resurvey of T. 37 S., R. 30 E., executed by  
A. N. Kimmell and Wm. H. Richards in 1917.

Thence with true meanders of Lake Sirena, through  
see. 1, along well defined shore line, with rolling  
land, covered with timber and undergrowth to the N.

N. 42° 38' W., 3.38 chs.  
N. 53° 00' W., 7.00 "  
N. 79° 00' W., 9.00 "  
S. 79° 30' W., 6.00 "  
S. 52° 45' W., 4.80 "  
S. 24° 00' W., 11.22 "

To witness cor. to angle  
point No. 2, of the  
fictitious meander line  
of Lake Sirena.

S. 15° 00' W., 6.74 "  
S. 4° 00' E., 7.70 "

To end of rolling land;  
beginning of level grassy  
land to the west.

S. 22° 00' E., 7.60 "

Dependent Resurvey of a Portion of the Exteriors and  
Subdivisions of T. 37 S., R. 29 E.

## Chains

True meanders of Lake Sirena, through sec. 1.

S. 36° 00' E., 6.00 chs. At 3.00 chs., end of  
level grassy land;  
beginning of rolling land,  
covered with undergrowth  
to the west.  
S. 52° 30' E., 6.53 " To the meander cor. of  
secs. 1 and 12, on the  
west side of the lake.

Land, part rolling, part level.  
Soil, sandy loam; 2nd rate.  
Timber, pine.  
Undergrowth, oak, hickory and palmetto.

Thence with true meanders of Lake Sirena, through  
sec. 12.

Along well defined shore line, with rolling land,  
covered with undergrowth to the south.

S. 49° 30' E., 5.74 chs.  
N. 88° 00' E., 2.80 "  
S. 60° 15' E., 4.07 " To witness cor. to  
meander cor. of secs. 1  
and 12, on the fictitious  
meander line of Lake  
Sirena.

S. 65° 40' E., 2.63 "  
N. 78° 30' E., 8.20 " To the meander cor. of  
secs. 7 and 12, on the  
East boundary of the township, on the SE. side of  
the lake; which is an iron post, 1 in. diam., 8 ins.  
above ground, mkd. and witnessed as described in  
the field notes of the resurvey of T. 37 S., R. 30 E.,  
executed by A. N. Kimmell and Wm. H. Richards in  
1917.

Land, rolling.  
Soil, sandy loam; 2nd rate.  
Timber, pine.  
Undergrowth, oak, hickory and palmetto.

Notes of the True Meander Line of Lake Stearns.

I commence at the meander cor. of secs. 2 and 35, on  
the N. bdy. of the township, on the east side of  
Lake Stearns.

Thence with true meanders of Lake Stearns, through  
sec. 2.

Along well defined shore line, with rolling land,  
covered with timber and undergrowth to the East.

S. 1° 45' E., 15.00 chs.  
S. 13° 30' E., 8.80 "  
S. 21° 45' E., 9.50 "  
S. 32° 45' E., 7.20 " At 7.20 chs., the NW. cor.  
of I. D. Steele's fence,  
bears N. 45° W., 1.50 chs.  
dist; fences run S. 26½° E.,  
and S. 86° E. from cor.

S. 33° 04' E., 3.50 "

Dependent Resurvey of a Portion of the Exteriors and  
Subdivisions of T. 37 S., R. 29 E.

## Chains

True meanders of Lake Stearns, through sec. 2.

S. 23° 45' E.,	3.76 chs.	To witness cor. to angle point No. 2, on the fictitious meander line of Lake Stearns.
S. 37° 30' E.,	4.40 "	
S. 42° 00' E.,	3.50 "	At 3.50 chs. the SW. cor. of I. D. Steele's house, bears S. 80½° E.
S. 45° 30' E.,	5.00 "	At 5.00 chs. the SW. cor. of I. D. Steele's house, bears N. 29° E., and SW. cor. of wire fence, bears S. 64½° E., 32 lks. dist.; fences run NW. and N. 83° E. from fence cor.-orange grove within inclosure.
S. 30° 30' E.,	5.00 "	
S. 4° 30' E.,	6.60 "	
S. 35° 15' W.,	6.50 "	
S. 56° 30' W.,	5.10 "	At 2.57 chs., wire fence comes up to the lake edge from the south.
S. 53° 00' W.,	11.90 "	
S. 41° 30' W.,	2.28 "	To the meander cor. of secs. 2 and 11, on the
SE. side of the Lake.		

Land, rolling.

Soil, sandy clay loam; 2nd rate.

Timber, pine.

Undergrowth, oak, hickory and palmetto.

Thence with true meanders of Lake Stearns, through sec. 11.

Along well defined shore line with rolling land, covered with undergrowth and timber, bordering the lake.

S. 44° 00' W.,	5.40 chs.	At 2.00 chs., road, 10 lks. to E. bears S. 44° W., and N. 60° E.
S. 53° 30' W.,	4.00 "	
S. 61° 30' W.,	5.00 "	
S. 38° 15' W.,	1.20 "	At 0.72 chs., road crosses from E. to W. side of meander line and follows narrow sandy beach.
S. 60° 21' W.,	3.50 "	To witness cor. to meander cor. of secs. 2 and 11, on the fictitious meander line of Lake Stearns.
S. 69° 28' W.,	13.52 "	
S. 78° 00' W.,	9.00 "	
N. 84° 45' W.,	7.60 "	At 4.25 chs., Cat-fish creek, 45 lks. wide, 10 ins. deep, flows into Lake Stearns from the S.
S. 79° 30' W.,	3.00 "	
N. 89° 00' W.,	7.90 "	To the meander cor. of secs. 10 and 11, on the south shore of Lake Stearns.

Dependent Resurvey of a Portion of the Exteriors and  
Subdivisions of T. 37 S., R. 29 E.

Chains

True meanders of Lake Stearns, through sec. 11.

Land, rolling.

Soil, sandy loam and sandy clay; 2nd and 3rd rate.

Timber, pine.

Undergrowth, oak, bay and palmetto.

Thence with true meanders of Lake Stearns, through  
sec. 10.

Along well defined shore line with sandy beach and  
rolling land, covered with timber and undergrowth,  
bordering the lake.

Wagon road along beach.

N. 81° 45' W., 8.10 chs. At 7.70 chs., wagon  
road, bears E. and SW.

N. 68° 30' W., 6.00 "

N. 56° 15' W., 7.40 "

N. 63° 15' W., 6.80 "

N. 33° 45' W., 3.90 "

N. 40° 45' W., 5.50 "

N. 57° 30' W., 1.43 "

To the meander cor. of  
secs. 3 and 10, on the

SW. side of Lake Stearns.

Land, rolling.

Soil, sandy; 3rd rate.

Timber, pine.

Undergrowth, oak and palmetto.

Thence with true meanders of Lake Stearns, through  
sec. 3.

Along well defined shore line, with rolling land  
covered with timber and undergrowth bordering the  
lake.

N. 51° 00' W., 10.56 chs. At 1.70 chs., creek,  
3 lks. wide, 6 ins. deep,  
flows NE., into Lake  
Stearns.

N. 29° 00' W., 16.00 "

N. 41° 18' W., 3.50 "

N. 29° 00' W., 12.40 "

N. 45° 30' W., 20.00 "

At 2.30 chs., creek, 3 lks.  
wide, 6 ins. deep, flows  
N. 20° W., into Lake  
Stearns.

N. 37° 30' W., 5.50 "

N. 39° 45' W., 10.00 "

At 2.20 chs., end of  
rolling land; beginning  
of bay gall swamp to  
the west.

N. 25° 15' W., 6.20 "

N. 32° 00' W., 2.20 "

To the meander cor. of  
secs. 3 and 4, on the

west side of Lake Stearns.

Land, part rolling, part level.

Soil, sandy and sandy muck; 3rd rate.

Timber, pine.

Undergrowth, oak, palmetto and bay.



Dependent Resurvey of a Portion of the Exteriors and  
Subdivisions of T. 37 S., R. 29 E.

Chains

Thence with true meanders of Lake Stearns, through  
sec. 4.

Along bay gall swamp land.

N. 32° 00' W., 0.60 chs.

N. 18° 15' W., 3.80 "

N. 22° 45' W., 8.90 "

N. 69° 30' W., 1.20 "

To the meander cor. of  
secs. 4 and 33, on the

N. bdy. of the township on the west side of Lake  
Stearns, described in Book "A".

Land, level.

Soil, sandy muck; 3rd rate.

Timber and undergrowth, bay.

Notes of the Meander Line of Crew's Lake, through  
sec. 5.

I commence at the meander cor. of secs. 5 and 32, on  
the N. bdy. of the township, on the west side of  
Crew's Lake, described in Book "A".

Thence with meanders of Crew's Lake, through sec. 5,  
along well defined shore line, with flat woods  
land bordering the lake.

S. 11° 30' E., 4.90 chs.

S. 27° 30' E., 5.20 "

S. 54° 30' E., 7.30 "

S. 77° 15' E., 6.00 "

N. 87° 45' E., 4.00 "

N. 69° 15' E., 4.70 "

N. 33° 30' E., 4.10 "

N. 15° 30' E., 3.90 "

N. 0° 47' E., 5.84 "

To the meander cor. of  
secs. 5 and 32, on

the N. bdy. of the township, on the east side  
of Crew's Lake, described in Book "A".

Land, level.

Soil, sandy; 3rd rate.

Timber, pine.

Undergrowth, oak and palmetto.

Notes of The True Meander Line of Lake Childs.

I commence at the meander cor. of secs. 13 and 18,  
on the E. bdy. of the township, on the N. shore of  
Lake Childs, which is an iron post, 1 in. diam.,  
8 ins. above ground, mkd. and witnessed as described  
in the field notes of the resurvey of T. 37 S., R.  
30 E., executed by A. N. Kimmell and Wm. H. Richards  
in 1917.

Thence with true meanders of Lake Childs, through  
sec. 13.

Along high sandy shore with rolling land, covered  
with timber and undergrowth, bordering the lake.

S. 47° 00' W., 12.20 chs.

S. 56° 45' W., 33.60 "

Dependent Resurvey of a Portion of the Extent and  
Subdivisions of T. 37 S., R. 29 E.

## Chains

True meanders of Lake Childs, through sec. 13.

S. 40° 30' W., 20.00 chs.

S. 22° 30' W., 15.00 "

S. 5° 15' W., 7.30 "

S. 29° 30' W., 4.79 "

To the meander cor. of  
secs. 13 and 24, on

the west side of the Lake.

Land, rolling.

Soil, sandy loam; 2nd rate.

Timber, pine.

Undergrowth, oak, hickory and palmetto.

Thence with new meanders of Lake Childs, through  
sec. 24.

Along sandy shore line, with rolling land, covered  
with timber and undergrowth, bordering the lake.

S. 21° 15' W., 22.30 chs.

S. 19° 30' W., 10.00 "

At 3.90 chs., intersect  
witness cor. to angle  
point No. 2, of the  
fictitious meander line  
of Lake Childs. Thence  
along shore line with  
flat woods to the west.

S. 9° 00' W., 12.00 "

S. 0° 30' W., 8.11 "

To witness cor. to  
angle point No. 1 of the  
fictitious meander line  
of Lake Childs.

S. 1° 30' E., 4.09 "

S. 15° 30' W., 5.00 "

S. 42° 00' W., 4.10 "

S. 20° 30' W., 5.00 "

S. 4° 00' E., 7.10 "

S. 7° 15' W., 6.54 "

To the meander cor. of  
secs. 24 and 25, on the

west side of Lake Childs.

Land, part level, part rolling.

Soil, part sandy loam and part sandy; 2nd and 3rd rate.

Timber, pine.

Undergrowth, oak, hickory and palmetto.

Thence with true meanders of Lake Childs, through  
sec. 25.

Along well defined shore line with flat woods land,  
bordering the lake.

S. 12° 00' E., 6.29 chs.

S. 9° 00' E., 6.10 "

S. 11° 15' E., 12.52 "

To witness cor. to angle  
point No. 5, of the  
fictitious meander line  
of Lake Childs.

S. 14° 00' E., 2.50 "

S. 23° 30' E., 8.30 "

S. 35° 00' E., 13.60 "

At 3.01 chs. intersect  
the witness cor. to  
angle point No. 5, of  
the fictitious meander  
line of Lake Childs.

Dependent Resurvey of a Portion of the Exteriors and  
Subdivisions of T. 37 S., R. 29 E.

## Chains

True meanders of Lake Childs, through sec. 25.

South,	6.80 chs.	
S. 36° 30' E.,	15.60 "	To witness cor. to angle
		point No. 2, of the
		fictitious meander line
		of Lake Childs.
S. 54° 30' E.,	21.65 "	At 5.00 chs., creek 20 lks.
		wide., 10 ins. deep, flows
		NR. into Lake Childs.
S. 21° 00' E.,	3.00 "	To the meander cor. of
		secs. 25 and 36, on the
SW. side of the lake.		

Land, level.  
Soil, sandy; 3rd rate.  
Timber, pine.  
Undergrowth, oak and palmetto.

Thence with true meanders of Lake Childs, through  
sec. 36.

Along well defined shore line with flat woods area,  
bordering the lake.

S. 48° 00' E.,	4.50 chs.	
S. 12° 45' W.,	9.60 "	
S. 36° 30' E.,	6.40 "	
S. 75° 30' E.,	5.00 "	
S. 84° 30' E.,	7.50 "	
S. 75° 45' E.,	9.30 "	
N. 82° 30' E.,	9.78 "	To the meander cor. of
		secs. 31 and 36, on the
E. bdy. of the township on the S. side of Lake		Childs, previously described.

Land, level.  
Soil, sandy; 3rd rate.  
Timber, pine.  
Undergrowth, oak and palmetto.

General Description.

The area resurveyed in this section lies along the west edge of what is known as the ridge area, and which ridge contains most of the valuable citrus lands of central Florida. If a line was drawn diagonally in a NW. and SE. direction, across secs. 11 and 13, from the shore of Lake Stearns to the shore of Lake Childs, this line would very nearly mark the dividing line between valuable land to the North and East, and poor land to the South and West. The land to the northeast of this line is mostly sandy loam and sandy clay loam soil and valuable citrus land. The land south, southwest and west of this line, is partly rolling sandy land and sandy flat woods land, and of little value except for grazing purposes and for the pine timber growing on it, which is mostly of an inferior grade, as most of the valuable timber was cut at the time of the building of the Atlantic Coast Line Ry., through T. 37 S., R. 30 E. (about 1917).

Dependent Resurvey of a Portion of the Exteriors and  
Subdivisions of T. 37 S., R. 29 E.

Chains

Lakes Stearns, Sirena and Childs were shown on the original plat but not in their proper size, shape or location. Crew's Lake was not shown as a meanderable lake on the original plat.

All four of these lakes are deep fresh water lakes, permanent in character and all have permanent, well defined banks. The lakes are fed by underground springs and by small creeks that seep out of the sand a short distance from the lakes. Soundings were made in Lake Stearns and Lake Childs and the maximum depth found in each was about 40 ft. Crew's Lake and Lake Sirena are probably somewhat shallower as they are smaller lakes.

I. D. Steel, in sec. 2, is the only settler living in this township. He has a fine orange grove of about 10 acres. The Lake Groves Co. of Lake Stearns, Fla. has recently cleared about 100 acres along the north boundary of secs. 1 and 2 and planted it to citrus fruits, and contemplates enlarging this cleared area as rapidly as possible. Marion Crews cultivates about 10 acres of land along the north boundary of sec. 5, west of Crew's Lake. He raises vegetables and cane.

The Atlantic Coast Line Ry. crosses the extreme NE. cor. of sec. 1, and the village of Lake Stearns, Fla., lies just to the northeast of this township.

The northeast portion of this township will undoubtedly develop rapidly in conjunction with adjoining areas to the east and north, both as a citrus fruit section and as a winter resort area.

Arthur W. Brown.

U. S. Cadastral Engineer.

Dependent Resurvey of a Portion of the Exterior and  
Subdivisions of T. 37 S., R. 29 E.

Boundaries of Area Resurveyed in T. 37 S., R. 29 E.

Latitudes, Departures and Closing Errors.

Line Designated	True Bearing	Dist ance	Latitudes		Departures	
			N.	S.	E.	W.
		Chs.	Chs.	Chs.	Chs.	Chs.
S, bdy. Sec. 36.	N. 89° 59' W.	80.95	.23			80.95
W. " "	36. N. 0° 19' E.	80.55	80.55		.45	
S. " "	26. S. 89° 46' W.	82.37		.34		82.37
W. " "	26. N. 0° 30' E.	79.94	79.94		.70	
S <sub>1</sub> , W. " "	23. N. 0° 06' E.	40.34	40.34		.07	
N <sub>1</sub> , W. " "	23. N. 1° 15' W.	40.24	40.23			.88
W. " "	14. N. 1° 15' W.	80.48	80.46			1.76
S. " "	10. N. 89° 03' W.	81.80	1.36			81.79
S <sub>1</sub> , W. " "	10. N. 1° 41' W.	40.30	40.28			1.18
N <sub>1</sub> , W. " "	10. N. 1° 45' W.	40.27	40.25			1.23
S. " "	4. N. 89° 51' W.	82.54	.22			82.54
S. " "	5. N. 89° 14' W.	82.07	1.10			82.06
S <sub>1</sub> , W. " "	5. N. 0° 58' E.	39.25	39.24		.66	
N <sub>1</sub> , W. " "	5. N. 0° 52' E.	40.24	40.24		.61	
N. " "	5. S. 89° 51' E.	81.34		.21	81.34	
W <sub>1</sub> , N. " "	4. S. 89° 53' E.	40.49		.08	40.49	
R <sub>1</sub> , N. " "	4. East,	34.70			34.70	
N. " "	S. 4, 3, 2. S. 89° 34' E.	138.63		1.04	138.63	
N. " "	S. 2, 1. East,	111.65			111.65	
E. " "	of Tp. S. 0° 40' E.	482.64		482.61	5.62	
Convergency	-----				.16	
			484.44	484.22	415.08	414.76
			484.22		414.76	
Error in Lat.			.22			
Error in Dept.					.32	

Supervisor's Certificate.

The undersigned hereby certifies that the dependent resurvey of a portion of Township 37 South, Range 29 East, of the Tallahassee Meridian, Florida, as set forth in the foregoing field notes, has been executed under his general direction and in accordance with the approved special instructions issued pursuant to authority contained in "Act effective October 30, 1919, designated as Public No. 71, 66th Congress", and office letter "E-CGT" dated December 18, 1919, addressed to the undersigned, and that the field notes of the said dependent resurvey have been carefully verified.

Washington, D. C.

June 20, 1921.

*A. N. Ridder*

Associate Supervisor of Surveys.











